

Soil pH Sensor

OVERVIEW:

The Dragino SPH01 series is a [Soil pH Sensor](#) for IoT of Agriculture. It is designed to measure the [soil PH and soil temperature](#), so to send to the platform to analyze the soil acid or alkali level. The probe is IP68 waterproof.


The sensor probe is made by Solid AgCl reference electrode and Pure metal pH sensitive electrode. It can detect [soil's pH](#) with high accuracy and stable value. The probe can be buried into soil for long time use.

It supports [BLE configure and wireless OTA update](#) which make user easy to use.

The Dragino SPH01 is powered by [8500mAh Li-SOCl₂ battery](#) or [solar panel with Li-ion battery](#), it is designed for long-term use up to several years.





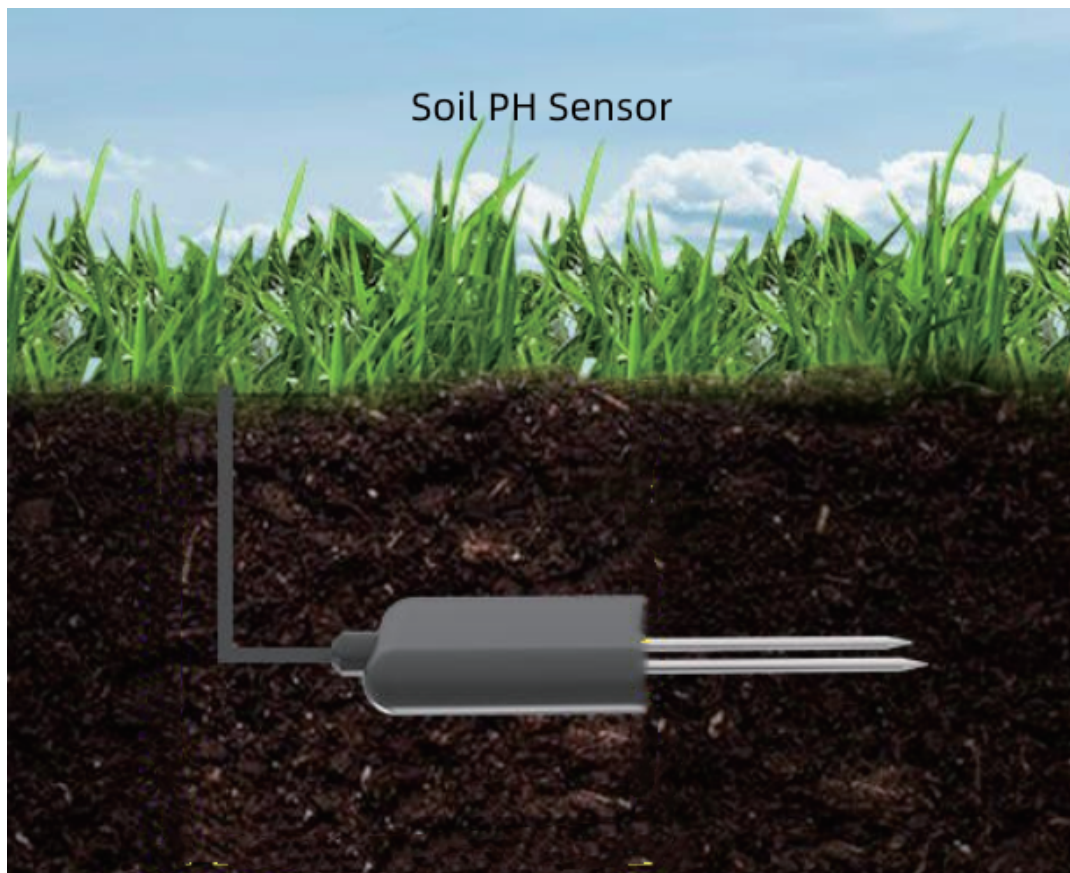









Application:



Smart Agriculture

Model Variants

| Variants | SPH01-LB | SPH01-LS | SPH01-NB | SPH01-NS | SPH01-CB | SPH01-CS |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| Connectivity |  |  |  |  |  |  |
| Configure Method | TTL, BLE, LoRaWAN | TTL, BLE, LoRaWAN | TTL, BLE, NB-IoT | TTL, BLE, NB-IoT | TTL, BLE, NB-IoT, LTE-M | TTL, BLE, NB-IoT, LTE-M |
| Upgrade Method | TTL, BLE, LoRa | TTL, BLE, LoRa | TTL, BLE | TTL, BLE | TTL, BLE | TTL, BLE |
| Features | Sensor /Probe: * Monitor soil pH with temperature compensation * Monitor soil temperature * Support pH calibration by end user * IP66 Waterproof Enclosure * IP68 rate for the Sensor Probe General Features: * Ultra-low power consumption * Support Bluetooth v5.1 remote configure and OTA update firmware * Uplink on periodically * GNSS for Location Report (for -CB & -CS models only) * Downlink to change configure | | | | | |
| Battery & Power |  * 8500 mAh Li/SOCI2 Battery |  * Solar + 3000 mAh Li-ion Battery |  * 8500 mAh Li/SOCI2 Battery |  * Solar + 3000 mAh Li-ion Battery |  * 8500 mAh Li/SOCI2 Battery |  * Solar + 3000 mAh Li-ion Battery |
| Power Consumption | * Sleep Mode: 5uA @ 3.3v * LoRa Transmit Mode: 125mA @ 20dBm, 82mA @ 14dBm | * Sleep mode: 74uA@3.8V * LoRa Transmit Mode: 206mA@14dBm, 236mA@20dBm | * Sleep mode: 14uA@3.3V * Max Transmit power: 350mA@3.3V | * Sleep mode: 74uA@3.4V * Max Transmit power: 350mA@3.4V | * Sleep mode: 14uA@3.3V * Max Transmit power: 350mA@3.3V | * Sleep mode: 74uA@3.4V * Max Transmit power: 350mA@3.4V |
| Supply Voltage | 2.5v ~ 3.6v | 3.7v ~ 4.2v | 2.5v ~ 3.6v | 3.7v ~ 4.2v | 2.6v ~ 3.6v | 3.7v ~ 4.2v |
| Operating Temperature | -40 ~ 85°C | -40 ~ 85°C | -40 ~ 85°C | -40 ~ 85°C | -40 ~ 85°C | -40 ~ 85°C |

Battery & Enclosure Option:

Li-SOCI2 Battery & Enclosure:



- Li/SOCI2 un-chargeable battery
- Capacity: 8500mAh
- Self-Discharge: <1% / Year @ 25°C
- Max continuously current: 130mA
- Max boost current: 2A, 1 second

Solar Version & Enclosure:



- 3000mAh Re-chargeable battery
- 0.9W on board solar pannel Suitable to used in the place where sun is sufficient



- This icon means support location feature by: GPS/ GLONASS/BDS/Galileo/ QZSS

Wireless Option:



- LoRaWAN 1.0.3 Class A
- Bands: CN470/EU433/KR920/US915/EU868/AS923/AU915/IN865
- OTAA or ABP Mode.
- World Wide Unique LoRaWAN Key
- RX sensitivity: down to -139 dBm.
- Max +22 dBm - 100 mW RF output



- CAT NB2 Bands:
- For -NB & -NS: B1/B2/B3/B4/B5/B8/B12/B13/B17/B18/B19/B20/B25/B28/B66/B70/B85
- For -CB & -CS: B1/B2/B3/B4/B5/B8/B12/B13/B18/B19/B20/B25/B28/B66/B71/B85
- Uplink via MQTT, MQTTs, TCP, UDP or CoAP
- Multiply Sampling and one uplink



- CAT-M1 / LTE-M Bands: B1/B2/B3/B4/B5/B8/B12/B13/B18/B19/B20/B25/B26/B27/B28/B66/B85
- Uplink via MQTT, MQTTs, TCP, UDP or CoAP
- Multiply Sampling and one uplink


Dragino Technology Co., Limited

Room 202, Block B, BCT Incubation Bases (BaoChengTai), No.8 CaiYunRoad
LongCheng Street, LongGang District ; Shenzhen 518116,China
Direct: +86 755 86610829 | Fax: +86 755 86647123


WWW.DRAGINO.COM
sales@dragino.com

What is 1T version for NB-IoT version?

The 1T version of NB-IoT Soil pH Sensor is with 1) 1NCE SIM Card & 2) ThingsEye Pre-configured.
1NCE SIM Card (10 Years Cellular service with 500MB Data Traffic, Enough for devices to uplink 10 years at 1hour interval).

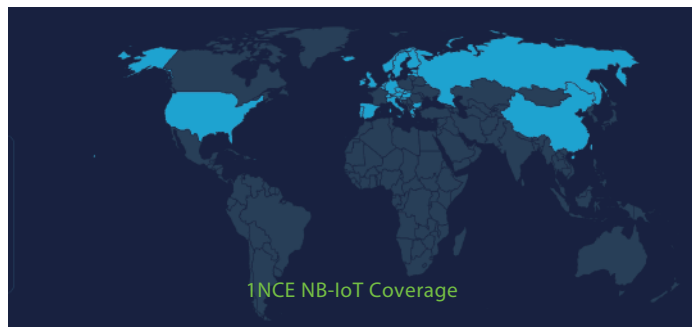

NB-IoT Network : Austria, Belgium, Bulgaria, China, Croatia, Czech Republic, Denmark, Estonia, Finland, Germany, Great Britain, Greece, Hungary, Ireland, Italy, Latvia, Malta, Netherlands, Norway, Portugal, Puerto Rico, Russia, Slovak Republic, Slovenia, Spain, Sweden, Switzerland, Taiwan, USA, US Virgin Islands.

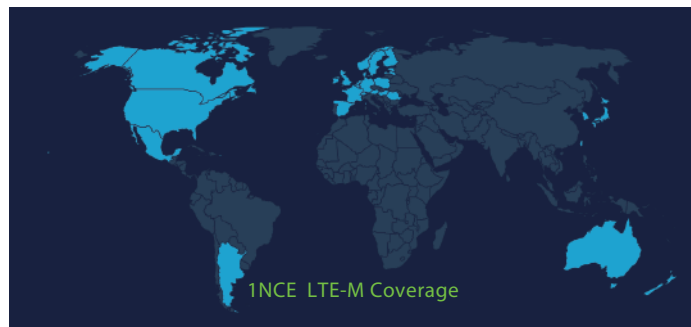

LTE-M Network : Argentina, Austria, Australia, Belgium, Canada, Denmark, Estonia, Finland, France, Germany, Great Britain, Hungary, Ireland, Japan, Jersey, Korea, Republic of, Latvia, Luxembourg, Mexico, Netherlands, New Zealand, Norway, Poland, Puerto Rico, Romania, Spain, Sweden, Switzerland, Taiwan, USA, US Virgin Islands.

ThingsEye.io platform:

1T version with ThingsEye IoT service pre-installed. This save a lot of work from user side to configure IoT server.

Below is Dash Board is the demo in ThingsEye.io.



Order Info:



Part Number: SPH01-LB-XX

XX: The default frequency band

- XX: Frequency Bands, options: EU433,CN470, EU868,IN865,KR920,AS923,AU915,US915

Part Number: SPH01-LS-XX

XX: The default frequency band

- XX: Frequency Bands, options: EU433,CN470, EU868,IN865,KR920,AS923,AU915,US915



Part Number: SPH01-NB-XX

XX:

- **GE**: General version (Exclude SIM card)
- **1T**: with 1NCE* 10 years 500MB SIM card Pre-configure to ThingsEye server

Part Number: SPH01-NS-XX

XX:

- **GE**: General version (Exclude SIM card)
- **1T**: with 1NCE* 10 years 500MB SIM card Pre-configure to ThingsEye server



Part Number: SPH01-CB-XX

XX:

- **GE**: General version (Exclude SIM card)
- **1T**: with 1NCE* 10 years 500MB SIM card Pre-configure to ThingsEye server

Part Number: SPH01-CS-XX

XX:

- **GE**: General version (Exclude SIM card)
- **1T**: with 1NCE* 10 years 500MB SIM card Pre-configure to ThingsEye server

Dragino Technology Co., Limited

Room 202, Block B, BCT Incubation Bases (BaoChengTai), No.8 CaiYunRoad
LongCheng Street, LongGang District ; Shenzhen 518116,China
Direct: +86 755 86610829 | Fax: +86 755 86647123

WWW.DRAGINO.COM
sales@dragino.com