


NMC-1009

2 Ports 10GbE SFP+ Module

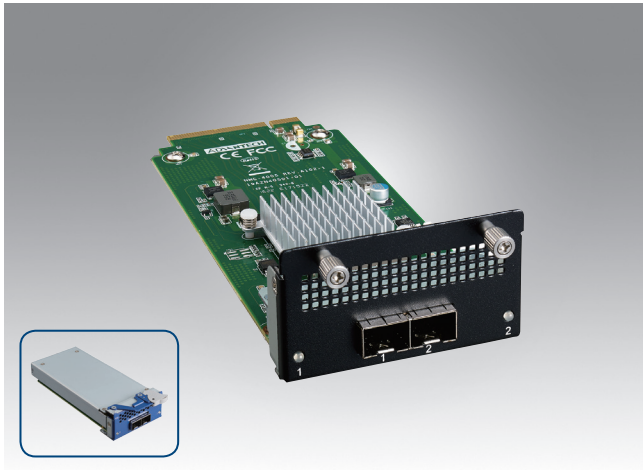

Features

- 1x Intel XL710-BM1
- 2 ports SFP+ connector
- PCI-E 3.0 x8
- RoHS compliant




Specifications

| | |
|-----------------------------|--|
| Controller | 1x Intel XL710-BM1 |
| Interface | PCI-E 3.0 x8 |
| Speed | 10GbE |
| Port | 2x SFP+ Port |
| LAN LED definition | Port#1 & Port#2 Indicator: Link: LED0 on Act: Blinking |
| Advanced Software Features | Teaming support IEEE 802.3ad IEEE 802.1Q VLANs IEEE 802.3 2005 flow control support Interrupt moderation |
| OS Support | Windows® Server 2012 R2, 2012, 2008 R2 X86-64 Linux RedHat EL 6.5 and 7.0 IA-32, X86-64, and IA-64 Linux SuSE SLES 11 SP3 and 12 IA-32, X86-64, and IA-64 FreeBSD 9 and 10 IA-32, X86-64, and IA-64 UEFI 2.1 and 2.3 X86-64 and I-64 VMware ESXi 5.1, ESXi 5.5 and ESXi 6.0 X86-64 |
| Operating Conditions | Operation: -5 ~ 45°C Storage: -20 ~ 60°C |
| Supported Platform | FWA-6520/FWA-5020 |
| Power Voltage & consumption | +12V ± 15% 16W |
| Dimension (mm) | 163.7 x 74.6 x 35.5 |
| Compliance | CE/FCC |

Dimensions

Unit: mm

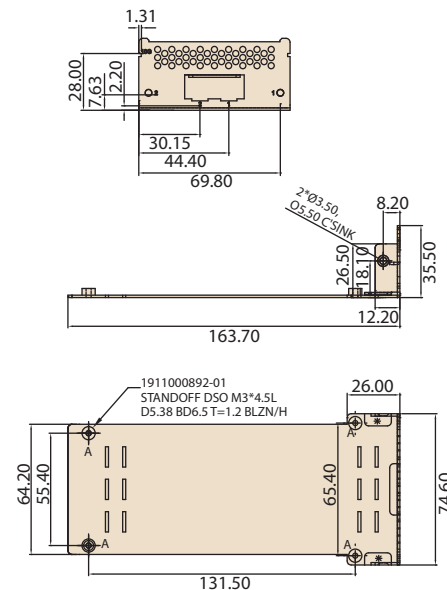

Ordering Information

| Part Number | Description |
|------------------|-----------------------------|
| NMC-1009-000010E | 2 Ports 10G SFP+ Latch |
| NMC-1009-02FSA1 | 2 Ports 10G SFP+ Thumbscrew |