# IPC-610-H

#### 4U Rackmount Chassis with Visual Alarm Notification




#### **Features**

- 4U rackmount chassis supports up to 15 add-on cards
- Shock-resistant disk drive bay design holds up to three 5.25" and one 3.5" disk drives
- Front accessible USB & PS/2 interfaces for easy data transfer
- Dual front-accessible filtered cooling fans provide optimized and streamlined airflow
- Front LEDs indicate power status, and HDD activity
- Lockable front door prevents unauthorized access
- Supports 80 plus single power supply or redundant power supply up to 500W

# C € FCC

# **Specifications**

		External				
Drive Bay	3.5"	1				
	5.25"	3	3			
Cooling	Fan	2 (12 cm / 85 CFM each)				
	Air Filter	Yes				
Front I/O Interface	USB	2				
	PS/2	1	1			
Miscellaneous	LED Indicators	Power, HDD, and power voltage status	Power, HDD, and power voltage status			
	Rear Panel		Backplane version: One 9-pin D-Sub opening Motherboard version: Five 9-pin D-Sub & one 25-pin D-sub openings			
Environment		Operating	Non-Operating			
	Temperature	0 ~ 40 °C (32 ~ 104 °F)	-20 ~ 60 °C (-4 ~ 140 °F)			
	Humidity	10 ~ 85% @ 40 °C, non-condensing	10 ~ 95% @ 40 °C, non-condensing			
	Vibration (5 ~ 500 Hz)	1 Grms	2 G			
	Shock	10 G (with 11 ms duration, half sine wave)	10 G (with 11 ms duration, half sine wave)			
Physical Characteristics	Dimensions (W x H x D)	482 x 177 x 479 mm (19" x 7" x 18.9")				
	Weight	15 kg (33 lb)				

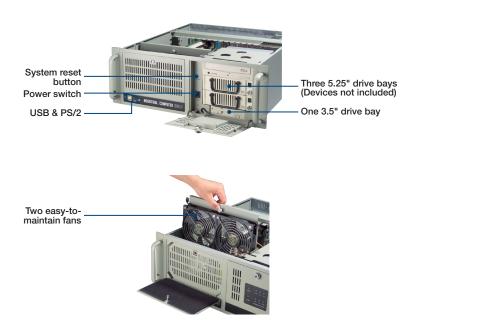




— Hold-down clamp

AD\ANTECH Industrial Chassis

All product specifications are subject to change without notice.

#### IPC-610-H

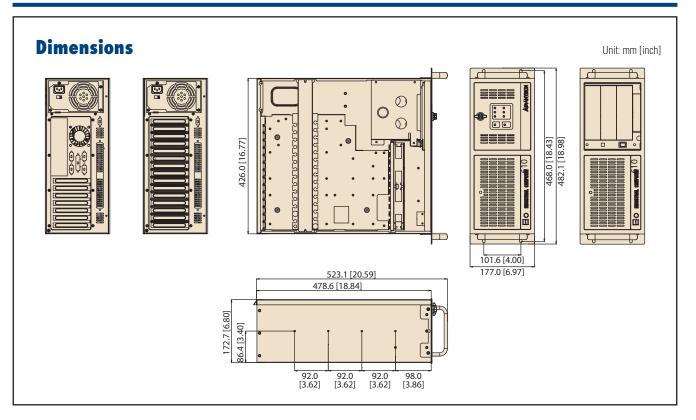

## **Ordering Information**

Power Supply	Switch Type			
NA	ATX			
PS8-300ATX-ZBE	ATX			
PS8-400ATX-ZE	ATX			
PS8-500ATX-ZE	ATX			
Motherboard Version				
NA	ATX			
PS8-300ATX-ZBE	ATX			
PS8-400ATX-ZE	ATX			
PS8-500ATX-ZE	ATX			
	NA PS8-300ATX-ZBE PS8-400ATX-ZE PS8-500ATX-ZE NA PS8-300ATX-ZBE PS8-400ATX-ZE			

#### **Power Supply Options**

(For detailed power supply specs, please refer to Chapter 13)

Part Number	80 Plus Grade	Wattage	Туре	Input
PS-300ATX-DC48E	-	300W	Single	DC - 48V
RPS8-350ATX-XE	Gold	350W	1+1 Redundant	AC 100 ~ 240 (full range)
RPS8-500ATX-XE	Bronze	500W	1+1 Redundant	AC 100 ~ 240 (full range)

## **Optional Accessories**

Part Number	Description
1700006916	ATX 24P/20P + 4P + 15P 60cm (connecting from power supply to LED board)
1700006917	Two Mini DIN (connect to MB) / 6P (connect to front I/O board) PS2 KB/Mouse cable
IPC-DT-5230E	Mobile rack for converting dual 5.25" drive bays to three 3.5" SATA HDD trays

\* If users use AIMB-763 or 3rd party motherboard, they need to purchase 1700006915 or 1700006916 for the front voltage LEDs to function normally. And they also need to purchase 1700006917 to make front PS/2 function normally.

#### **Spare Parts**

Part Number	Description
2130006147S000	Door filter 97.6 x 36.6 x 5 mm
2130004803S000	Fan filter 115 x 195 x 5 mm