



Features

- Provides power temporarily in the event of blackout. Allow the computer to shut down correctly and save the data
- Protect your computer from data loss when an unexpected power disruption happens
- The UPS power can last for 30 minutes on a 50W load device when the power source is lost.
- DC input 12V/10A; DC output 12V/10A; I/O interface: TTL to USB; RS-232 (Option)

Applications

- Factory Automation
- CNC Machine
- Semiconductor Equipment
- ATM/ Kiosk / Gaming /Gambling Application
- Mission Critical

➔ Packing List

Description
1 x WOUS-1210
1 x USB Convert Cable
1 x 2pin DC Power Cable
1 x 2pin Phoenix connector


➔ Ordering Information

Part No.	Description
WOUS-1210A-A1	Window OS Uncrash System, DC UPS input 12V/10A;DC output 12V/10A

WOUS-1210A-A1

Arestech

→ Dimensions

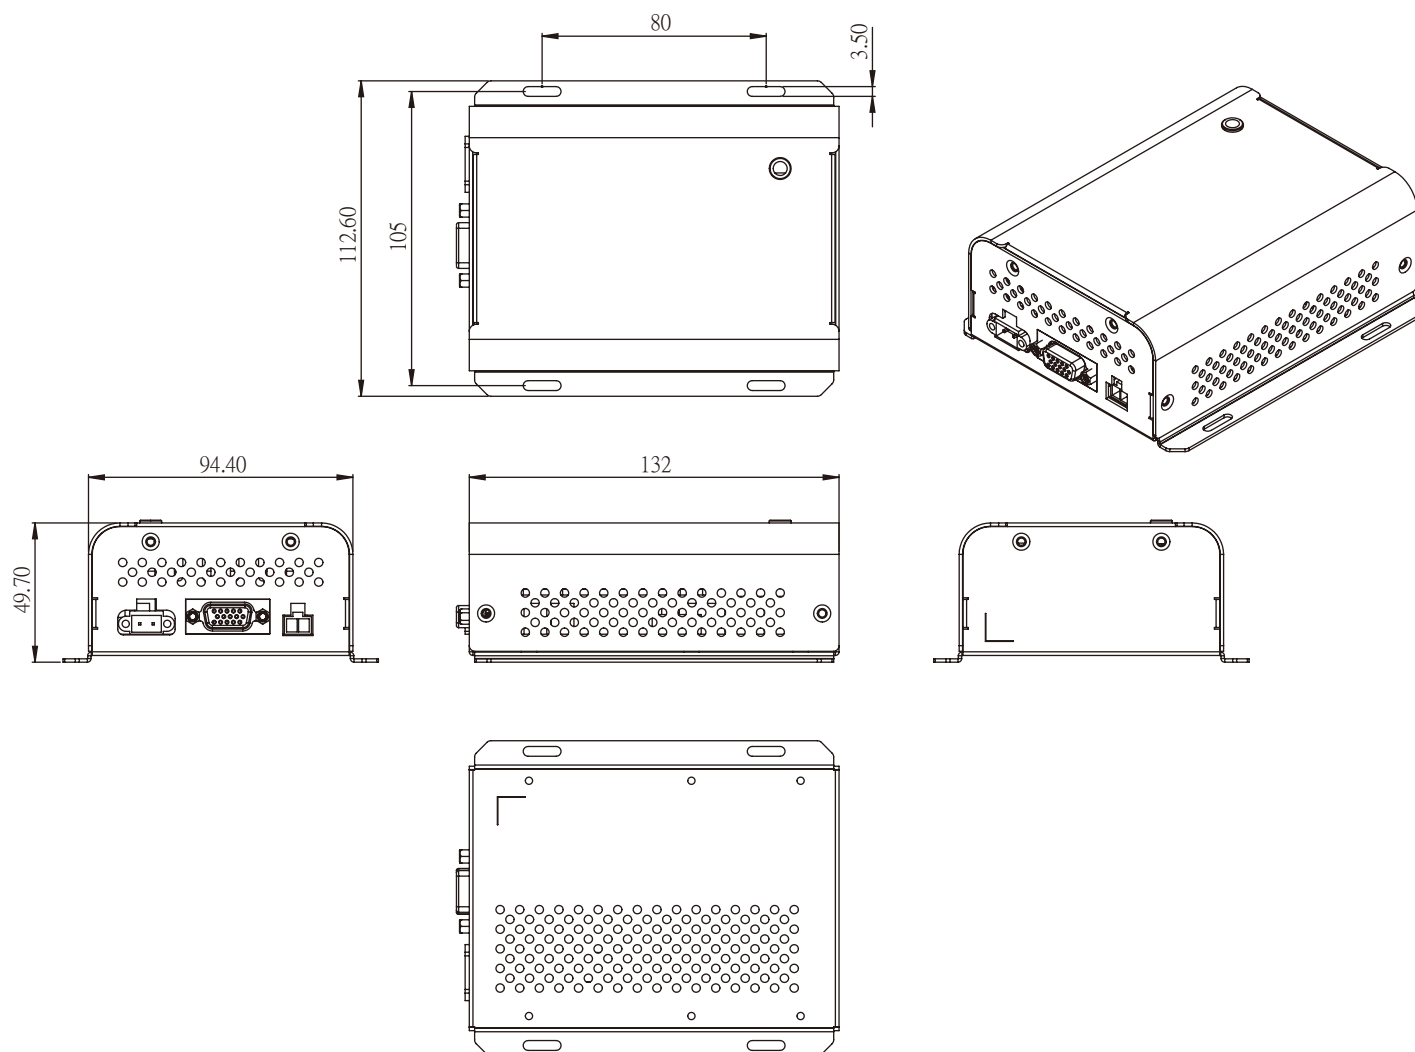

→ Specifications

Model		WOUS-1210A-A1
Power	Input Voltage DC	12V
	Input current DC	1~10A
	Output voltage battery mode	12V
	Output voltage normal mode	12V
	Output current	1~10A
	Charge current	1A
	Output power	120W (MAX)
I/O Interface	Phoenix connector	2 Pin DC Input
	Serial Port	DP9 TTL Signal
	Mini fit Connector	2 Pin DC output
	LED	Status Red LED
Battery	Capacity	3,200mAh (0.2C, 2.50V discharge)
	Voltage	3.70V (0.2C, 2.50V discharge)
Environment	Operating Temperature Charge	-10~50°C (14~122°F)
	Operating Temperature, Discharge	-30~60°C (-22~140°F); Cut-off temp. 70°C (158°F)
	Storage Temperature(30% SOC)	1 month : -30~60°C, 3 months : -30~45°C, 1 year : -30~24°C
	Humidity	5~95% @ 40° C, non-condensing
	Vibration	TBD
	Certification	TBD
General	Ingress Protection	TBD
	Dimensions (L x W x H)	132mm x 94.4mm x 49.7mm
	Weight	0.705kg