

17" IP66/69K Waterproof Stainless Steel P-CAP/5 Wire Resistive Touch Panel PC with Intel® i5-7200U/i3-7100U Processor



Features

- 17" SXGA LCD Panel with P-CAP/ 5 Wire Resistive Touch
- Intel® Core™ i5-7200U/ i3-7100U Processor
- Completely Flat Front Panel Design
- Stainless Steel Full IP66/69K Waterproof
- Support VESA Mounting and Yoke Mounting

Applications

- Food & Beverage Processing Application
- Hospitality and Catering Service
- Pharmaceutical and Biopharmaceutical Equipment
- Animal Feed Production Facility
- Chemical, Gas & Oil Critical Environment

→ Packing List

Description
1 x PPC-Z177


→ Optional Items

Part No.	Description
APW-60M12V-01	12V, 60W, 5A, 5-pin M12 Connector (US)
APW-60M12V-02	12V, 60W, 5A, 5-pin M12 Connector (EU)
AKT-USB2M12	M12 Connector to USB2.0 Cable, 2m
AKT-USB31M12	M12 Connector to USB 3.0 Cable, 1.8m
AKT-COM2M12	M12 Connector to DB9 Cable, 2m
AKT-LAN2M12	M12 Connector to LAN Cable, 2m
AWD-WF006	wifi 802.11 a/b/g/n/ac/BT4.0 (2T2R) + 2 IP66 antenna(dual band), miniPCle Half size
AWD-WF007	wifi 802.11 b/g/n/BT4.0 (1T1R) + 1 IP66 antenna(dual band), mini PCIe Half size

→ Ordering Information

Part No.	Description
PPC-Z177-B63A1	17" 4:3 (1280 x 1024), 350nits, Stainless Steel 316 Full IP66/69K Protection, Fanless Panel PC with Intel® Core i5-7200U CPU, Projected Capacitive Touch, 4G RAM, 128G M.2, 2 USB 3.0, 1 x M12 for 2 USB2.0, 1 RS232, 1 RS-232/422/485, 2 GbE, DC 9-36 V (M12 Connector)
PPC-Z177-B64A1	17" 4:3 (1280 x 1024), 350nits, Stainless Steel 316 Full IP66/69K Protection, Fanless Panel PC with Intel® Core i3-7100U CPU, Projected Capacitive Touch, 4G RAM, 128G M.2, 2 USB 3.0, 1 x M12 for 2 USB2.0, 1 RS232, 1 RS-232/422/485, 2 GbE, DC 9-36 V (M12 Connector)
PPC-Z177R-B61A2	17" 4:3 (1280 x 1024), 350nits, Stainless Steel 316 Full IP66/69K Protection, Fanless Panel PC with Intel® Core i5-7200U CPU, 5 Wire Resistive Touch, 4G RAM, 128G M.2, 2 USB 3.0, 1 x M12 for 2 USB2.0, 1 RS232, 1 RS-232/422/485, 2 GbE, DC 9-36 V (M12 Connector)
PPC-Z177R-B62A2	17" 4:3 (1280 x 1024), 350nits, Stainless Steel 316 Full IP66/69K Protection, Fanless Panel PC with Intel® Core i3-7100U CPU, 5 Wire Resistive Touch, 4G RAM, 128G M.2, 2 USB 3.0, 1 x M12 for 2 USB2.0, 1 RS232, 1 RS-232/422/485, 2 GbE, DC 9-36 V (M12 Connector)

→ Dimensions

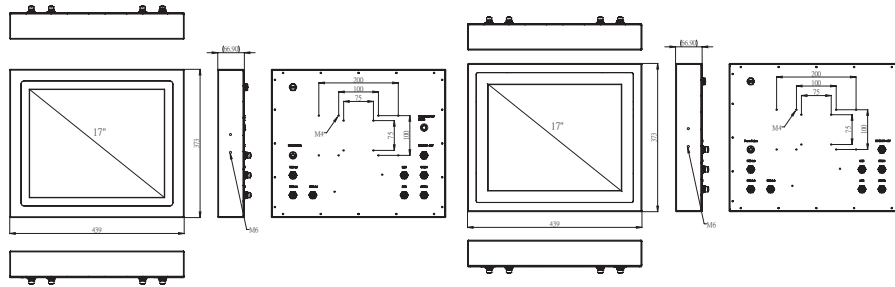

→ Specifications

PPC-Z177P-B63A1

PPC-Z177R-B61A2

	Model	PPC-Z177P-B63A1	PPC-Z177P-B64A1	PPC-Z177R-B61A2	PPC-Z177R-B62A2
Processor System	CPU	Intel® Core® i5-7200U	Intel® Core® i3-7100U	Intel® Core® i5-7200U	Intel® Core® i3-7100U
	Frequency	Duad-Core up to 3.1 GHz	Duad-Core up to 2.4 GHz	Duad-Core up to 3.1 GHz	Duad-Core up to 2.4 GHz
	L2 Cache	3 MB			
	System Chipset	N/A			
	BIOS	UEFI			
Memory	Technology	DDR4 2133 MHz SDRAM			
	Max. Capacity	32 GB			
	Socket/ (On Board)	2, (260-pin SO-DIMM)			
Display	Panel Size	17" LCD Panel			
	Aspect Ratio	4:3			
	Resolution	1280 x 1024 (SXGA)			
	Viewing Angle	80 x 80 (H) x 60 x 80 (V)			
	Brightness	350 (cd/m2)			
	Contrast Ratio	800:1			
	VGA / HDMI / DP / DVI	N/A			
Touchscreen	Multi Display	LCD			
	Touchscreen Type	Projected Capacitive		5-wire Resistive Touch	
	Surface Hardness	7 Mohs		3 Mohs	
	Durability	N/A		36 millions times	
I/O Interface	Transparency	90% (±3%)		80% (±3%)	
	USB	4, 2 USB 3.0 , 1 x M12 for 2 USB2.0, M12 Connector			
	Serial Port	2, COM (1 RS-232, 1 RS-232/422/485), M12 Connector			
	Digital I/O	N/A			
	Ethernet	2, GbE LAN ports (Intel® i219V and Intel® i211AT)			
Expansion	Others	N/A			
	miniPCIe/ M.2 Slot	1, Mini PCIe (Full-size); 1, M.2 E Key 2230 (USB/ PCIe x1)			
Audio	PCI/ PCIe Slot	N/A			
	Connector	N/A			
Storage	HDD/SSD	N/A(by option)			
	mSATA/ M.2 / eMMC	1, M.2 M Key 2280 (SATA III / PCIe x4)			
Power	Power On Model	AT/ATX			
	Power Supply Voltage	9-36 V DC input			
	Connector Type	M12 Connector			
	Power Consumption(Typical/Max.)	Typical: 2.38 A @ 12 V (28.56 W), Max: 3.63 A @ 12 V (43.64 W)			
Mounting	Battery	Lithium 3 V / 210 mAH			
	VESA Mount	75mmx 75mm; 100mm x 100mm : 200mm x 200mm			
	Panel Mount	N/A			
Environment	Others	Yoke Mount			
	Operating Temperature	-20~60° C (-4~140° F) w/ Extended Operation Temp. RAM & SSD			
	Storage Temperature	-40~85° C (-40~185° F)			
	Humidity	5~95% @ 40° C, non-condensing			
	Vibration	5-500 Hz, 0.026 G ² /Hz, 2.16 Grms, X, Y, Z, 1 hour per axis			
General	Shock	20 G, IEC 60068-2-27, half sine, 11 ms duration			
	Certification	CE, FCC Class A			
	Thermal Dissipation	Fanless			
	Material, Surface Finish	Stainless steel 316, Brush polish			
	Ingress Protection	Full IP66/IP69K Protection			
	Dimensions (L x W x H)	439 x 373 x 66.9 mm (17.28" x 14.69" x 2.63")			
	Net Weight	7.77 kg (17.13 lb)			
	Operating System	Windows 10 IoT 64Bit, Linux kernal 4.0.x or above			