# IEC 60945 RUBBER BACKLIT KEYBOARDS
IP67 sealed, full travel

NSI presents their standard full travel rubber keyboard.
This 92 key backlit keyboard features a compact full travel rubber keyboard with integrated waterproof 25 mm laser trackball and scroll function. This keyboard is approved for use with Solas Marine applications (f.i ECDIS).

The rubber keys are proven for efficient cleaning, reduced disinfection time and protection against cross contamination. The backlit keys warrant for optimized performance while working in low-light environments.
A non-backlit version is also available.

MAIN FEATURES

- Certificate of Conformity fully compliant with IEC60945
- Compact layout, 92 full travel keys
- Removable 25 mm laser trackball
- Dimmable backlighting at 8 levels by two dedicated keys
- Low power LED's warrant for a long life
- No external power supply necessary, keyboardport power sufficient
- Intelligent luminosity setting of "capslock" LED's
- White backlighting as standard, other colours on request.

- Panel mount version :
- Front panel mounting with studs
- Dimensions / weight : 350 x 159 x 36 mm/ 0,6 kg

- Enclosed version :
- Dimensions / weight : 353 x 162 x 40 mm / 0,8 kg

IP67 **25mm** **LED**

GENERAL TECHNICAL SPECIFICATIONS

Sealing	: IP67 sealed
Keys	: 92 full travel rubber keys
Pointing Device	: 25 mm laser trackball
Output	: one 1,8 m. USB cable
Power requirements	: Directly from USB port
Operating temp.	: 0°C to +60°C
Switch force	: 210 grams
Switch stroke	: 2 mm
Lifetime switches	: 2 million actuations

ORDER INFO

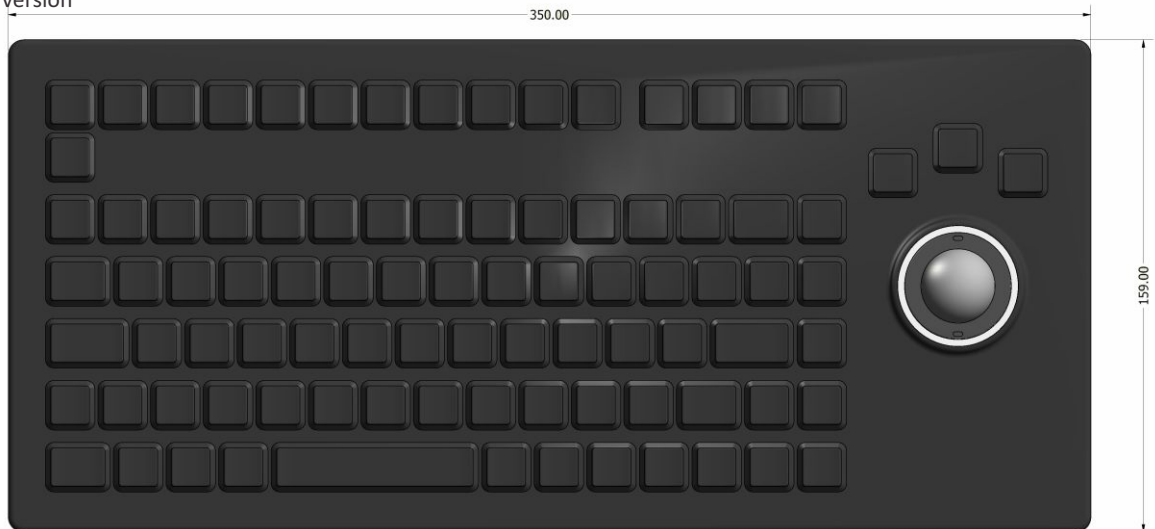| LAYOUT	Backlit version		Non-backlit version	
	PANEL MOUNT	ENCLOSED	PANEL MOUNT	ENCLOSED
US Qwerty	RKCT92F0001-W-MC1	RKCT92S0001-W-MC1	RKCT92F0001-N-MC1	RKCT92S0001-N-MC1
French Azerty	RKCT92F0033-W-MC1	RKCT92S0033-W-MC1	RKCT92F0033-N-MC1	RKCT92S0033-N-MC1
Norwegian Qwerty	RKCT92F0047-W-MC1	RKCT92S0047-W-MC1	RKCT92F0047-N-MC1	RKCT92S0047-N-MC1
German Qwertz	RKCT92F0049-W-MC1	RKCT92S0049-W-MC1	RKCT92F0049-N-MC1	RKCT92S0049-N-MC1

VER. 1.0

IEC 60945 RUBBER BACKLIT KEYBOARDS

IP67 sealed, full travel

DIMENSIONAL DRAWING

Panel mount version

Enclosed version

Dim in mm.

VER. 1.0

The company reserves the right to alter without prior knowledge the specification or design of any standard product or service.