

15" Capacitive IP65 HB Touch Monitor



- Comprehensive IP65 protection
- Anti-glare surface treatment (chemically etched)
- 1000+ cd/m² brightness for increased visibility
- Extended voltage input 8~36V
- 10-Finger-Multi Touch Capacitive Touch Panel
- All-in-One cable (HDMI)
- VESA 100 mounting
- 2 years guarantee



For industrial and outdoor applications in harsh environments, faytech provides IP65 High Brightness Touch Monitors, which are the perfect solution for such applications.

Advantages of these devices:

- Increased brightness (1000+ cd/m²)
- Complete IP65 protection (dust- and waterproof)
- All-in-one cable solution, with VGA or HDMI video connection, USB for Touch and a 8-36V power supply.

The case of the device consists of a robust, sealed aluminum enclosure, with on the front two buttons to adjust the brightness (with 5 available 5 levels). On the back of the device are fixation holes for either VESA 75 or VESA 100 mounting, which ensures solid fixation in any environment.

Available customizations:

- All-in-one cable, e.g. VGA, HDMI, Video, DVI, S-Video, Audio, Power supply, Voltage, USB or Serial for touch.
- Case color, logo's, housing and fixation
- Rail and/or VESA 75, VESA 100 on the back




HDMI

HIGH BRIGHTNESS 



EXTENDED
8 - 36 V
VOLTAGE 



Product name	15" Capacitive IP65 HB Touch Monitor
Model number / EAN number	FT15TMIP65CAPHBOB / 6920734015023

IP rating	
IP65	

LCD Panel	
Screen diagonal (Inch/cm)	15/38.10
Display active screen size (cm)	30.40×22.80
Aspect ratio	4:3
Physical resolution	1024×768
Maximum showable resolution	1920×1080
Colours displayed	16.7M
Brightness (cd/m²)	1000+
Contrast	700:1
Typical reaction time Tr/ Tf (ms)	8/12
Visual Angle horizontal/vertical (°)	160/160
Backlight / Backlight Lifetime (hours)	LED / 30,000



External Connectors	
All-In-One cable HDMI version	1x HDMI
	1x USB-Touch
	1x 8-36V DC-IN

Touch Panel	
Touch Technology	Projected Capacitive 10-Point Multitouch
Touch Panel Drivers	Windows; Linux; Mac; Android
Touch Life (Contacts)	Unlimited
Surface Hardness	7H
Surface Treatment	Anti-glare (chemical etched)

Operation / Mechanical	
Operating Temperature (°C)	-10 ~ +60
Humidity Range (RH)	10% - 90%
Net weight (kg)	3.00
Gross weight (kg)	4.50 (incl. cartonage)
Housing material	Aluminum case
Housing (cm) L × W × H	38.94 × 31.34 × 4.80
Mounting	VESA 100

Power	
Power Indicator	Green LED
Power Supply	100-240V ACDC active switching; 12V DC-Out
Working Power (V)	8~36
Power Consumption (W)	20
Stand-By Consumption (W)	<1

Included in the Delivery	
Power Supply (see Power section)	
Short Installation Manual	
All-In-One cable (HDMI)	

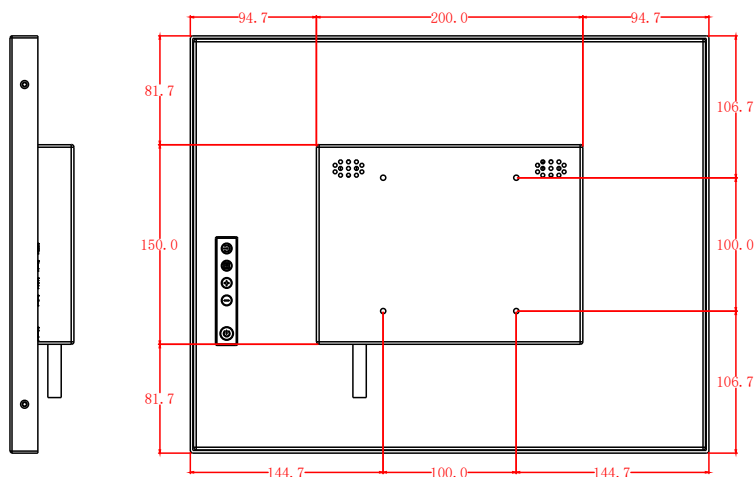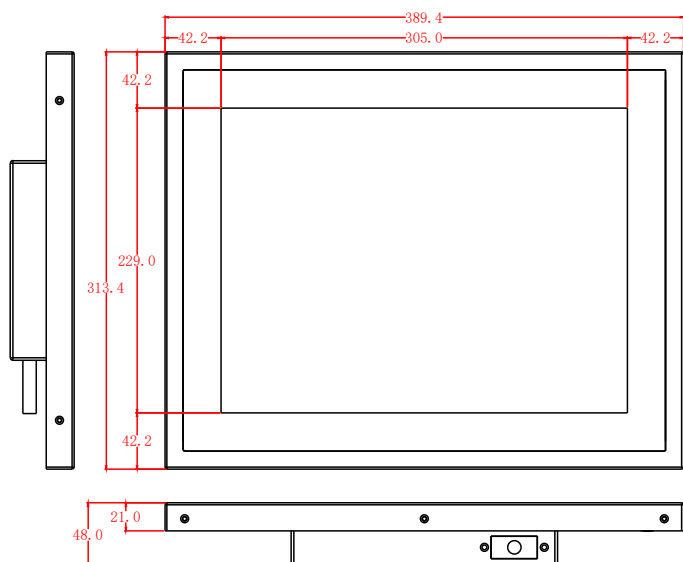

Corporate Headquarters

faytech AG
 Bischhäuser Aue 10
 37213 Witzenhausen
 Germany

support@faytech.com
contact@faytech.com
www.faytech.com

China: +86 755 8958 0612
 Germany: +49 5542 30374 10
 USA: +1 646 205 3214
 India: +91 11 49707436
 Japan: +070 4127 5167