32" Capacitive Touch Monitor



- FullHD Industrial LCD-panel with baclight LED, A+ quality
- capacitive 10-finger multitouch
- external UL certified ACDC power supply

faytech's Large Format Multi-Touch Monitors are the right choice for rugged and harsh industrial environments. On the other side fits the sturdy, protecting Aluminum frame perfect in any high class POS environment. The capacitive 10-finger multi touch panels provide an incredible good touch usage feeling, like working on a large smartphone.

Available in 32", 42", and 55" sizes, each model is built for reliability and extended service. An industrial HD LCD panel with energy-saving LED technology, A+-quality, wide viewing angle and capacitive multitouch panel, makes these the perfect interactive Touch solution for digital signage, way-finding, classrooms, dealerships, supermarkets, hotels, sports arenas, fashion shows, industrial 4.0 projects, interactive visualisations and many other uses.

With all standard connectors equipped like HDMI, DVI, VGA, USB, 24VDC-IN and all actual operation systems supported, these hi-tech displays work reliable right away by an easy installation.

faytech's Large Format Touchscreen Monitors are also available with faytech's embedded mainbord, faytech's fay-002 industrial PC mainboard (J1900 QuadCore processor) or with a stronger fanless Intel i5-5200u processor, with higher brightness up to 2500 Nits and as waterproof IP65 solution.













| Product name | 32" Capacitive Touch Monitor |
|--------------------------|------------------------------|
| Article code / EAN numer | FT32TMBCAP / 6920734032105 |

| Anti-glare LCD Panel | | |
|---|--------------|--|
| IP rated front panel | IP40 | |
| Screen diagonal (Inch/cm): | 31.5/80.01 | |
| Display active screen size: | 69.84x39.29 | |
| Aspect ratio: | 16:9 | |
| Physical resolution: | 1920x1080 | |
| Maximum showable resolution (TPCs: external): | 1920x1200 | |
| Colours displayed: | 16.7M | |
| Brightness (cd/m2): | 350 | |
| Contrast: | 3000:1 | |
| Typical reaction time Tr/ Tf (ms): | 6/6 | |
| Visual Angle horizontal/vertical (°): | 178/178 | |
| Backlight / Backlight Lifetime (hours): | LED / 40,000 | |


| External Connectors | |
|---------------------|--------------------------|
| Video | 1x VGA |
| | 1x DVI-D |
| | 1x HDMI 1.1 (incl. HDCP) |
| Audio | 1x PC-Audio |
| | 1x Earphone-Out |
| Touch Connector | 1x USB |
| Connectors | 1x 12V DC-IN |


| Touch Panel | |
|-----------------------|--|
| Touch Technology | Projected Capacitive 10-point Multitouch |
| Touch Connector | USB |
| Touch Panel Drivers | Windows; Linux; Mac; Android |
| Touch Life (Contacts) | Unlimited |
| Surface Hardness | 7H |

| Operation / Mechanical | | |
|----------------------------|-------------------------|--|
| Operating Temperature (°C) | -10 ~ +60 | |
| Humidity Range (RH) | 20%-90% | |
| Net weight (kg) | 16.80 | |
| Gross weight (kg) | 20.00 (incl. cartonage) | |
| Housing material | Aluminum | |
| Housing (cm) LxWxH | 77.00 x 47.20 x 5.90 | |
| Mounting | VESA 400x300 | |

| Power | | |
|--------------------------|--|--|
| Power Indicator | Green LED | |
| Power Supply | 100-240V ACDC active switching; 24V DC-Out | |
| Working Power (V) | 24 | |
| Power Consumption (W) | 65 | |
| Stand-By Consumption (W) | <0.5 | |

| Included in the Delivery | |
|----------------------------------|--|
| Power Supply (see Power section) | |
| Driver DVD | |
| Short Installation Manual | |

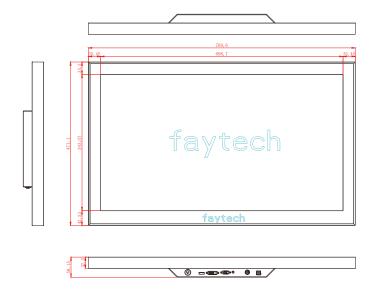



Corporate Headquarters

China: +86 755 89580612 Germany: +49 551 82098660

USA: +1 646 205 3214