# **ACP-2020**

#### **2U Rackmount Short Depth Chassis for ATX and uATX Motherboard**



#### **Features**

- 398 mm short depth 2U rackmount chassis
- Supports ATX and uATX form factor single processor motherboard
- Two Internal 2.5" drive bay and two "hot-swap or external" drive bay
- Supports 80 Plus single 350W or 500W redundant power supply
- Front-accessible system fan without opening top cover for easy maintenance
- Built-in Intelligent System Module enabling whole system fan control and remote manageability

### **C** € FCC

### **Specifications**


Drive Bay		External	Internal		
	Slim Optical Drive	1	-		
	2.5"	2 (hot-swap tray module as optional)*	2		
Cooling	Fan	1 (8 cm/46.62CFM)			
Cooling	Air Filter	Yes			
Front I/O Interface	USB 3.0*	2			
Miscellaneous	LED Indicators	Power, HDD, temperature, fan, LAN1, and LAN2			
IVIISCEIIAIIEOUS	Rear Panel	Two 9-pin D-Sub			
Intelligent System Module	CPU/System fan speed, CPU/System temperature				
Hardware Monitoring	(Only Advantech AIMB-78X, PCE-51XX/71XX mainboards can enable CPU fan speed and temperature monitoring function of Intelligent System Module)				
		Operating	Non-Operating		
	Temperature	0 ~ 40 °C (32 ~ 104 °F)	-20 ~ 60 °C (-4 ~ 140 °F)		
Environment	Humidity	10 ~ 85% @ 40 °C, non-condensing	10 ~ 95% @ 60 °C, non-condensing		
	Vibration (5 ~ 500 Hz)	1 Grms	2 G		
	Shock	10 G (with 11 ms duration, half sine wave)			
Physical Characteristics	Dimensions (W x H x D)	482 x 88 x 398 mm (19" x 3.46" x 15.7")			
Physical Characteristics	Weight	8.6 kg (18.96 lbs)			

The USB 3.0 ports do not operate if the motherboard has no on-board USB 3.0 box header.

#### **Front View**

# Slim ODD drive bay LED indicators Dual USB 3.0 ports Switch / buttons

#### **Rear View**



HDD drive bay (hot-swap module as optional) **Top View** 



Optional SATA/SAS hot-swap tray module 98R1310010E


Supports ATX/ Micro-ATX form factor motherboard Intrusion switch

Internal 2.5" HDD x2 drive bays

Front accessible fan

without opening top cover

<sup>\*</sup> ACP-2020 2.5" drive bay, both default internal and hot-swap tray module support 2.5" HDD with thickness less than 14.7mm.

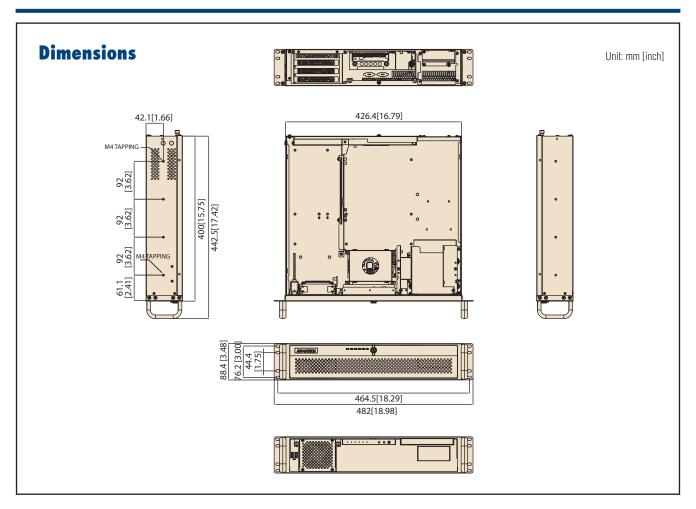

### **Ordering Information**

Part Number	Power supply	80 Plus grade	Power supply type	Wattage	Switch
ACP-2020MB-35B	PS8-350FATX-GB	Gold	Single	350W	ATX
ACP-2020MB-50RE	RPS8-500U2-XE	Bronze	1+1 redundant	500W	ATX

Suggest using CPU cooler 1960052651N021, max. CPU TDP 84W.

## **Packing List**

Part Number	Description	Quantity
ACP-2020	2U rackmount chassis with handle set	1
1750009329-01	system fan	1
1700024778-11	system fan cable	1
Content of Accessory Box		
98R22020000	Handle set	1
	Screws/nuts and rubber for motherboard and devices	one bag
1960073134N000	HDD convert bracket , 3.5" to dual 2.5" ( max T:14.7mm)	2
2001202000	user manual	1

### **Optional Accessories**

Part Number	Description	
96CB-SATAPOWER-6P2	SATA power wire 6-pin to big 4-pin (for slim ODD)	
1990021407T000	Door filter	
98R1310010E	2.5" SATA/SAS Hot-swap module	
Rear I/O panel kit for low-profile add-on cards		
1939000361	Screws (should purchase 7 pcs)	
1960074850T000	I/O bracket (should purchase 7 pcs)	
1960019475T201	Rear panel for low-profile	