

4-Channels Distance Detection Sensor

OVERVIEW:

The Dragino DDS04 series is a **4-Channels Distance Sensor** for Internet of Things solution. It is capable to add up to four **Ultrasonic Sensors** to measure four distances at the same time.

The Dragino DDS04 series can be applied to scenarios such as horizontal distance measurement, parking management system, object proximity and presence detection, intelligent trash can management system, robot obstacle avoidance, automatic control, sewer, etc.

It detects the **distance between the measured object and the sensor**, and uploads the value via wireless to **LoRaWAN, NB-IoT or CAT-M1** Server.

It supports **BLE configure and wireless OTA update** which make user easy to use.

The Dragino DDS04 series is powered by **8500mAh Li-SOCI2 battery** or **solar panel with Li-ion battery**, it is designed for long-term use up to several years.




Model DDS04 series doesn't include probes.
Probes are purchased separately

Applications:



Intelligent trash can management

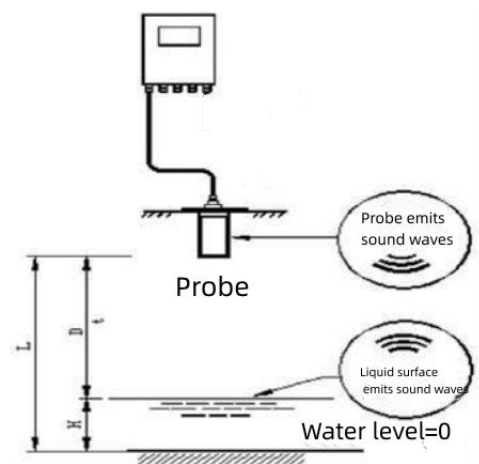

Liquid level measurement

4-channels distance sensor -- Probe Option

A01A-15

- ※ Detect Distance: 28 cm ~ 750 cm
- ※ Blink Spot Distance: 0 ~ 28cm
- ※ Accuracy: $\pm(1\text{cm}+S*0.3\%)$ (S: Distance)
- ※ Measure Angle: $\sim 40^\circ$
- ※ Cable Length: 1.5 meter
- ※ Temperature Compensation
- ※ Suitable for Flat Object Detect
- ※ IP67 Water Proof



A02-15

- ※ Detect Distance: 3cm ~ 450cm
- ※ Blink Spot Distance: 0 ~ 3cm
- ※ Accuracy: $\pm(1\text{cm}+S*0.3\%)$ (S: Distance)
- ※ Measure Angle: $\sim 60^\circ$
- ※ Cable Length: 1.5 meter
- ※ Temperature Compensation
- ※ Suitable for Flat Object Detect, Rubbish Bin
- ※ IP67 Water Proof



A13-15

- ※ Detect Distance: 25cm ~ 200cm
- ※ Blink Spot Distance: 0 ~ 25cm
- ※ Accuracy: $\pm(1\text{cm}+S*0.3\%)$ (S: Distance)
- ※ Measure Angle: $\sim 20^\circ$
- ※ Cable Length: 1.5 meter
- ※ Temperature Compensation
- ※ Suitable for Flat Object Detect, Rubbish Bin
- ※ IP67 Water Proof















A16-15

- ※ Detect Distance: 50cm ~ 1500cm
- ※ Blink Spot Distance: 0 ~ 50cm
- ※ Accuracy: $\pm(1\text{cm}+S*0.3\%)$ (S: Distance)
- ※ Measure Angle: $\sim 40^\circ$
- ※ Cable Length: 1.5 meter
- ※ Temperature Compensation
- ※ Suitable for Long Distance Detect, Water Level
- ※ IP67 Water Proof



Model Variants

Variants	DDS04-LB	DDS04-LS	DDS04-NB	DDS04-NS	DDS04-CB	DDS04-CS
Connectivity						
Configure Method	TTL, BLE, LoRaWAN	TTL, BLE, LoRaWAN	TTL, BLE, NB-IoT	TTL, BLE, NB-IoT	TTL, BLE, NB-IoT, LTE-M	TTL, BLE, NB-IoT, LTE-M
Upgrade Method	TTL, BLE, LoRa	TTL, BLE, LoRa	TTL, BLE	TTL, BLE	TTL, BLE	TTL, BLE
Features	<p>Sensor /Probe:</p> <ul style="list-style-type: none"> * max: 4 x Distance Detect Channels * Different types of probes can be used together * Detect Range: Base on External Probe <p>General Features:</p> <ul style="list-style-type: none"> * Ultra-low power consumption * Support Bluetooth v5.1 remote configure and OTA update firmware * Uplink on periodically * GNSS for Location Report (for -CB & -CS models only) * Downlink to change configure 					
Battery & Power						
Power Consumption	<ul style="list-style-type: none"> * 8500 mAh Li/SOCI2 Battery * Sleep Mode: 5uA @ 3.3v * LoRa Transmit Mode: 125mA @ 20dBm, 82mA @ 14dBm 	<ul style="list-style-type: none"> * Solar + 3000 mAh Li-ion Battery * Sleep mode: 74uA@3.8V * LoRa Transmit Mode: 206mA@14dBm, 236mA@20dBm 	<ul style="list-style-type: none"> * 8500 mAh Li/SOCI2 Battery * Sleep mode: 14uA@3.3V * Max Transmit power: 350mA@3.3V 	<ul style="list-style-type: none"> * Solar + 3000 mAh Li-ion Battery * Sleep mode: 74uA@3.4V * Max Transmit power: 350mA@3.4V 	<ul style="list-style-type: none"> * 8500 mAh Li/SOCI2 Battery * Sleep mode: 14uA@3.3V * Max Transmit power: 350mA@3.3V 	<ul style="list-style-type: none"> * Solar + 3000 mAh Li-ion Battery * Sleep mode: 74uA@3.4V * Max Transmit power: 350mA@3.4V
Supply Voltage	2.5v ~ 3.6v	3.7v ~ 4.2v	2.5v ~ 3.6v	3.7v ~ 4.2v	2.6v ~ 3.6v	3.7v ~ 4.2v
Operating Temperature	-40 ~ 85°C	-40 ~ 85°C	-40 ~ 85°C	-40 ~ 85°C	-40 ~ 85°C	-40 ~ 85°C

Battery & Enclosure Option:

Li-SOCI2 Battery & Enclosure:



- Li/SOCI2 un-chargeable battery
- Capacity: 8500mAh
- Self-Discharge: <1% / Year @ 25°C
- Max continuously current: 130mA
- Max boost current: 2A, 1 second

Solar Version & Enclosure:



- 3000mAh Re-chargeable battery
- 0.9W on board solar pannel Suitable to used in the place where sun is sufficient



- This icon means support location feature by: GPS/GLONASS/BDS/Galileo/QZSS

Wireless Option:



- LoRaWAN 1.0.3 Class A
- Bands: CN470/EU433/KR920/US915/EU868/AS923/AU915/IN865
- OTAA or ABP Mode.
- World Wide Unique LoRaWAN Key
- RX sensitivity: down to -139 dBm.
- Max +22 dBm - 100 mW RF output



- CAT NB2 Bands:
- For -NB & -NS: B1/B2/B3/B4/B5/B8/B12/B13/B17/B18/B19/B20/B25/B28/B66/B70/B85
- For -CB & -CS: B1/B2/B3/B4/B5/B8/B12/B13/B18/B19/B20/B25/B28/B66/B71/B85
- Uplink via MQTT, MQTTs, TCP, UDP or CoAP
- Multiply Sampling and one uplink



- CAT-M1 / LTE-M Bands: B1/B2/B3/B4/B5/B8/B12/B13/B18/B19/B20/B25/B26/B27/B28/B66/B85
- Uplink via MQTT, MQTTs, TCP, UDP or CoAP
- Multiply Sampling and one uplink


Dragino Technology Co., Limited

Room 202, Block B, BCT Incubation Bases (BaoChengTai), No.8 CaiYunRoad
LongCheng Street, LongGang District ; Shenzhen 518116, China
Direct: +86 755 86610829 | Fax: +86 755 86647123


WWW.DRAGINO.COM
sales@dragino.com

What is 1T version for NB-IoT version?

The 1T version of NB-IoT 4-Channels Distance Sensor is with a) 1NCE SIM Card & 2) ThingsEye Pre-configured.
1NCE SIM Card (10 Years Cellular service with 500MB Data Traffic, Enough for devices to uplink 10 years at 1hour interval).

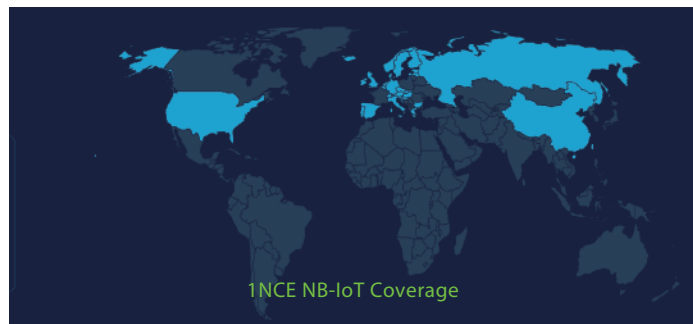

NB-IoT Network : Austria, Belgium, Bulgaria, China, Croatia, Czech Republic, Denmark, Estonia, Finland, Germany, Great Britain, Greece, Hungary, Ireland, Italy, Latvia, Malta, Netherlands, Norway, Portugal, Puerto Rico, Russia, Slovak Republic, Slovenia, Spain, Sweden, Switzerland, Taiwan, USA, US Virgin Islands.

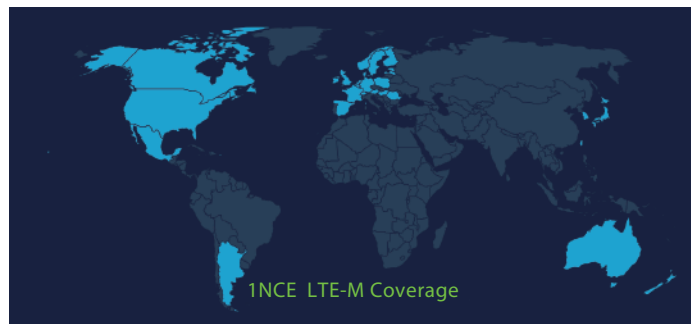

LTE-M Network : Argentina, Austria, Australia, Belgium, Canada, Denmark, Estonia, Finland, France, Germany, Great Britain, Hungary, Ireland, Japan, Jersey, Korea, Republic of, Latvia, Luxembourg, Mexico, Netherlands, New Zealand, Norway, Poland, Puerto Rico, Romania, Spain, Sweden, Switzerland, Taiwan, USA, US Virgin Islands.

ThingsEye.io platform:

1T version with ThingsEye IoT service pre-installed. This save a lot of work from user side to configure IoT server.

Below is Dash Board is the demo in ThingsEye.io.



Order Info:



Part Number: DDS04-LB-XX

XX: The default frequency band

- XX: Frequency Bands, options: EU433,CN470, EU868,IN865,KR920,AS923,AU915,US915

Probe Options: A01A-15, A02-15, A13-15, A16-15

Part Number: DDS04-LS-XX

XX: The default frequency band

- XX: Frequency Bands, options: EU433,CN470, EU868,IN865,KR920,AS923,AU915,US915

Probe Options: A01A-15, A02-15, A13-15, A16-15



Part Number: DDS04-NB-XX

XX:

- **GE:** General version (Exclude SIM card)
- **1T:** with 1NCE* 10 years 500MB SIM card Pre-configure to ThingsEye server

Probe Options: A01A-15, A02-15, A13-15, A16-15

Part Number: DDS04-NS-XX

XX:

- **GE:** General version (Exclude SIM card)
- **1T:** with 1NCE* 10 years 500MB SIM card Pre-configure to ThingsEye server

Probe Options: A01A-15, A02-15, A13-15, A16-15



Part Number: DDS04-CB-XX

XX:

- **GE:** General version (Exclude SIM card)
- **1T:** with 1NCE* 10 years 500MB SIM card Pre-configure to ThingsEye server

Probe Options: A01A-15, A02-15, A13-15, A16-15

Part Number: DDS04-CS-XX

XX:

- **GE:** General version (Exclude SIM card)
- **1T:** with 1NCE* 10 years 500MB SIM card Pre-configure to ThingsEye server

Probe Options: A01A-15, A02-15, A13-15, A16-15

Dragino Technology Co., Limited

Room 202, Block B, BCT Incubation Bases (BaoChengTai), No.8 CaiYunRoad
LongCheng Street, LongGang District ; Shenzhen 518116,China
Direct: +86 755 86610829 | Fax: +86 755 86647123

WWW.DRAGINO.COM
sales@dragino.com