




## S510AD RUGGED LAPTOP



- Boostez la productivité avec les processeurs AMD Ryzen™ AI et Copilot+ PC, offrant des performances alimentées par l'IA et optimisées pour les applications edge
- Écran FHD de 15.6 pouces avec technologie Getac de lecture en plein soleil (1 000 nits) et écran tactile capacitif
- Châssis durable sans sacrifier la robustesse pour un avenir plus vert
- Sécurité d'entreprise renforcée avec AMD PRO, caméra d'authentification faciale Windows Hello, TPM 2.0 et de nombreuses autres options d'authentification multi-facteurs
- Connectez-vous en toute confiance grâce à des options E/S polyvalentes, notamment des solutions USB Type-C renforcées et des stations d'accueil

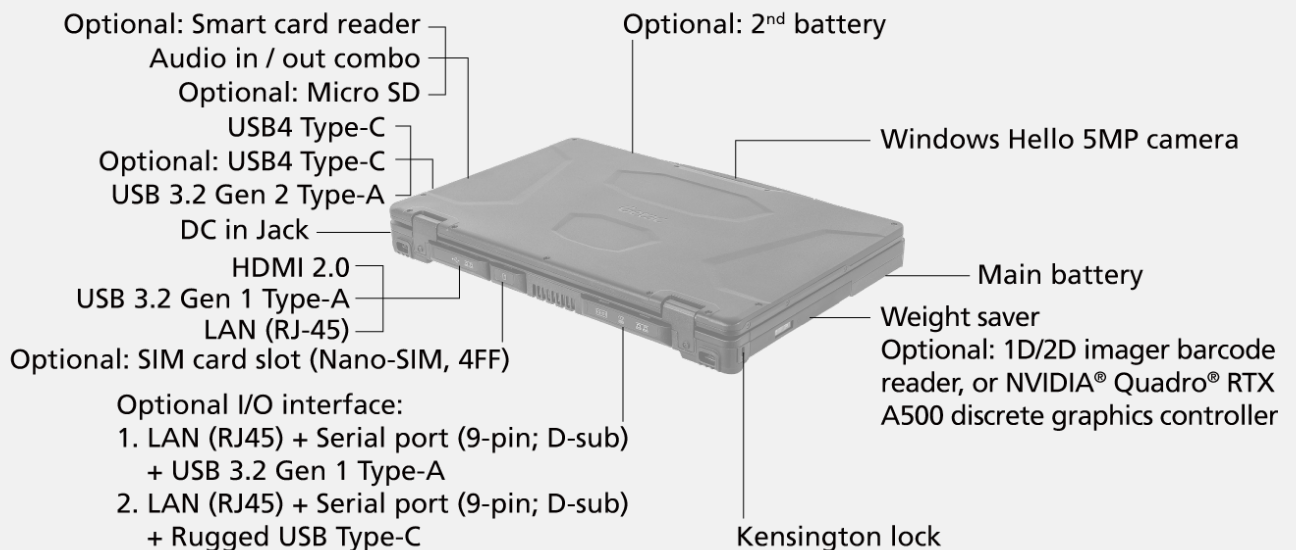

## SPECIFICATIONS

### Generation

G1

### Operating System

Windows 11 Pro

### CPU (Mobile Computing Platform)

AMD Ryzen™ AI 5 340 Processor  
(6-core/12-thread, 22MB cache, up to 4.8 GHz max boost)

### Platform options:

AMD Ryzen™ AI 5 PRO 340 Processor  
(6-core/12-thread, 22MB cache, up to 4.8 GHz max boost)

AMD Ryzen™ AI 7 350 Processor  
(8-core/16-thread, 24MB cache, up to 5.0 GHz max boost)

AMD Ryzen™ AI 7 PRO 350 Processor  
(8-core/16-thread, 24MB cache, up to 5.0 GHz max boost)

### Graphics

AMD Radeon™ 840M  
(For AMD Ryzen™ AI 5 340 Processor)  
AMD Radeon™ 860M  
(For AMD Ryzen™ AI 7 350 Processor)  
Optional: NVIDIA® Quadro®  
RTX A500 discrete graphics controller <sup>i, ii</sup>

### NPU

AMD XDNA™ 2 (Up to 50 TOPS)

### Display

15.6" TFT LCD FHD (1920 x 1080)  
Protection film  
1,000 nits display with Getac sunlight readable technology  
Optional: Capacitive multi-touch LumiBond screen

### Storage & Memory

16GB DDR5  
Optional: 32GB / 64GB DDR5

256GB PCIe NVMe SSD  
Optional: 512GB / 1TB / 2TB PCIe NVMe SSD

### Keyboard

LED backlit membrane keyboard

### Pointing Device

Touchscreen  
- Optional: Capacitive multi-touch screen  
Touchpad  
- Glide touchpad with multi-touch

### Audio

Integrated stereo speakers  
Integrated dual-array microphone

### Expansion Slot

Optional: Smart card reader

### Multimedia Bay

Weight saver  
Optional: 1D/2D imager barcode reader <sup>ii</sup>  
Optional: NVIDIA® Quadro®  
RTX A500 discrete graphics controller <sup>i, ii</sup>

### I/O Interface

Audio in/out combo x 1  
DC in Jack x 1  
USB4 Type-C x 1  
USB 3.2 Gen 2 Type-A x 1  
USB 3.2 Gen 1 Type-A x 1  
Optional: MicroSD x 1  
LAN (RJ45) x 1  
HDMI 2.0 x 1  
Optional: SIM card slot x 1 (Nano-SIM, 4FF) <sup>iii</sup>  
Windows Hello face-authentication  
5MP camera (front-facing) x 1  
Docking connector x 1  
Optional: USB4 Type-C x 1  
Optional: RF antenna pass-through for GPS,  
WWAN, and WLAN

### Configurable I/O options :

1. LAN (RJ45) <sup>iv</sup> + Serial port (9-pin; D-sub)  
+ USB 3.2 Gen 1 Type-A
2. LAN (RJ45) <sup>iv</sup> + Serial port (9-pin; D-sub)  
+ Rugged USB Type-C

### Communication Interface

10/100/1000 base-T Ethernet  
Wi-Fi 7, 802.11be  
Bluetooth (v5.4) <sup>v</sup>  
Optional: 2.5GBASE-T Ethernet <sup>iv</sup>  
Optional: Dual SIM (Nano-SIM 4FF and e-SIM) <sup>iii, vi</sup>  
Optional: 4G LTE mobile broadband with integrated GPS <sup>iii, vii</sup>  
Optional: 5G Sub-6 with integrated GPS <sup>ii, vii, viii</sup>  
Optional: Dedicated GPS with L1/L5

### Security Feature

TPM 2.0  
Kensington lock  
Windows Hello face-authentication 5MP camera (front-facing)  
Getac Secure Erase  
Optional: AMD PRO Technology  
Optional: Fingerprint reader  
Optional: HF RFID reader <sup>ix</sup>  
Optional: Absolute Persistence®

### Power

Battery (10.8V, typical 6900mAh; min. 6600mAh)  
AC adapter (65W, 100-240VAC)  
Optional: 2<sup>nd</sup> battery (10.8V, typical 6900mAh; min. 6600mAh) <sup>1</sup>  
Optional: AC adapter (90W, 100-240VAC, 50/60Hz)

### Dimension (W x D x H) & Weight

375 x 277 x 39mm (14.8" x 10.9" x 1.5") <sup>x</sup>  
2350g (5.18lbs) <sup>x</sup>

### Rugged Feature

MIL-STD-810H certified  
IP53 certified  
Vibration & 3ft (0.9m) drop resistant <sup>xi</sup>

### Environmental Specification

Temperature <sup>xii</sup> :  
- Operating: -29°C to 63°C / -20°F to 145°F  
- Storage: -51°C to 71°C / -60°F to 160°F  
Humidity:  
- 95% RH, non-condensing

### Pre-installed Software

Getac Utility  
Getac Geolocation  
Getac Barcode Manager <sup>xiii</sup>  
Optional: Absolute Secure Endpoint

### Optional software

Getac Driving Safety Utility  
Getac Monitoring  
Getac VGPS Utility <sup>xiv</sup>  
Absolute Secure Access

### Accessories

Battery (10.8V, typical 6900mAh; min. 6600mAh)  
AC adapter (65W, 100-240VAC)

### Optional:

Carry bag  
Battery (10.8V, typical 6900mAh; min. 6600mAh)  
AC adapter (90W, 100-240VAC, 50/60Hz) <sup>1</sup>  
DC-DC vehicle adapter (120W, 11-32VDC)  
Multi-Bay charger (Dual-Bay)  
Multi-Bay charger (Eight-Bay)  
Capacitive stylus with tether  
Protection film  
Vehicle cradle  
Vehicle dock <sup>xv</sup>  
Spare SSD kit  
100W Type-C adapter  
Getac DS100 USB-C docking station with AC adapter  
Rugged USB-C Cable

### Warranty

Rien n'est plus synonyme de qualité qu'un fabricant fier de son produit. Nous avons conçu l'ordinateur portable de bout en bout pour résister aux chutes, aux chocs, aux déversements, aux vibrations et plus encore. Nous avons confiance en notre qualité et c'est pourquoi il est livré en standard avec une garantie de 3 ans, la meilleure du secteur. C'est la tranquillité d'esprit de savoir que vous êtes couvert.

### Standard

Garantie limitée de 3 ans

# S510AD RUGGED LAPTOP

- I. NVIDIA® Quadro® RTX A500 discrete graphics controller is required to configure with dual battery and 90W AC adapter.
- II. NVIDIA® Quadro® RTX A500 discrete graphics controller and 1D/2D imager barcode reader are mutually exclusive options.
- III. Units with 4G/5G option come with an embedded SIM card slot.
- IV. The optional 2<sup>nd</sup> LAN is 2.5G BASE-T Ethernet.
- V. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that are operating in the area.
- VI. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.
- VII. Only available in the US, UK, EU, Australia, and New Zealand, the operating temperature is -15°C to 63°C / 5°F to 145°F.
- VIII. Support GPS, GLONASS, Galileo, BeiDou and QZSS.
- IX. 13.56MHz HF RFID reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- X. Weight and dimensions vary from configurations and optional accessories.
- XI. Drop test results vary from configurations and optional accessories.
- XII. Tested by an independent third-party test lab following MIL-STD-810H.
- XIII. Available when barcode reader option is selected.
- XIV. Models require either embedded or standalone GPS module.
- XV. Gamber-Johnson and Havis vehicle docks are e-mark certified.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

Vehicle Dock (Gamber-Johnson, Havis)	
Serial Port	1
Audio Output	-
DC in Jack	1
USB	USB-A 3.0 x 2, USB-A 2.0 x 2, USB-C 3.0 x 1
LAN	1
HDMI	1
Display Port	-
RF Antenna Connector	3 (WWAN, WLAN, GPS)
Kensington Lock	-

# Getac

GETAC TECHNOLOGY CORPORATION

12, avenue du Québec Bâtiment Goyave 91140  
Villebon sur Yvette Tel: +33 160 12 80 60  
Sales-Getac-France@getac.com |  
www.getac.com/fr/

Copyright © 2026 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved. Les informations sont fournies ici pour référence seulement, les spécifications disponibles doivent faire l'objet d'un devis sur demande.