


SPC-815 / SPC-821 V2

15.6" /21.5" Full HD Standalone Multi-Touch Panel Computer

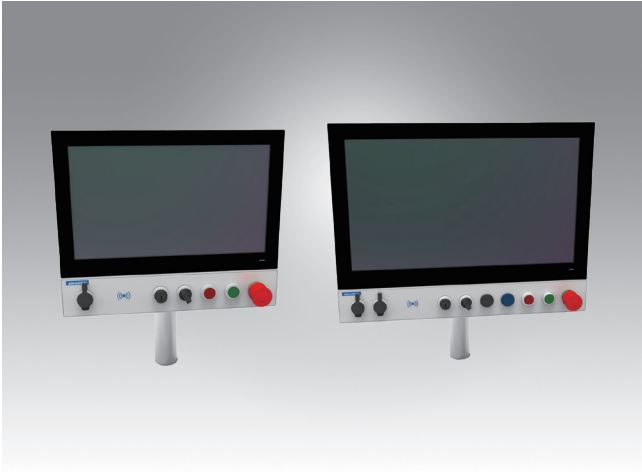

Features

- 15.6"/21.5" FHD TFT LED LCD display
- Intel® Core™ i3-1315URE / i5-1345URE Processor
- 16:9 widescreen with P-CAP multi-touch control
- Enhanced touch screen for impact resistance
- Silicone-free enclosure with all-round IP65-rated protection
- Supports CP 40 (Rittal) and CS-480 B.Flex (Bernstein) mount standards
- Supports the wide series of operational panel configuration
- Optional Front-facing USB ensures easy maintenance

Introduction

SPC-800 V2 is an Poll-mounted panel PC that can be integrated with an extension unit that supports wide series of operational panel configuration. Designed to support diverse industrial mounting standards, such as CP 40 (Rittal) and CS-480 (Bernstein), SPC-800 V2 is a series of versatile panel PC that can be installed in a variety of environment. The SPC-800 V2 is powered by an Intel® Raptor Lake-U processor that delivers advanced graphical performance to facilitate the realization of field IoT applications. The panel PC is also equipped with a silicone-free enclosure that features all-around IP65-rated protection from water and dust. Moreover, with the inclusion of an I/O cover, all cables can be hidden for a tidy appearance and simplified wiring installation.

Specifications

General

- **Certification** CCC, CE, FCC Class A, UL
- **Cooling System** Fanless design
- **Dimensions (W x H x D)** 21.5": 545.24 x 415.59 x 185mm
15.6": 400.74 x 331.76 x 185mm
- **Enclosure** Front bezel: Die-cast aluminum alloy
Rear housing: Die-cast aluminum alloy
Front push button bracket : metal sheet
- **Mount Options** Pole Mount (Rittal CP40 & Bernstein CS-480)
VESA Mount (Optional through VESA Kit)
- **OS Support** Windows 11 LTSC
- **Power Consumption** 80W
- **Power Input** 19~24 V_{DC}
- **Weight (Net)** 21.5": 8.5KG
15.6": 6.5KG

System

- **CPU** Intel® Raptor Lake-U Series Processor
Intel® Core™ i3-1315URE
Intel® Core™ i5-1345URE
- **Memory** 2 x SODIMM DDR5 Slot, Max 64GB
Default 8GB DDR5 4800MHZ RAM
- **LAN** 2 x Intel i226LM controller 10M / 100M / 1000M / 2.5G
- **Expansion Slots** 1 x M.2 2230 E-Key slot
- **Storage** 1 x M.2 2242/2280 M-Key slot
(SATA / NVME PCIe x 4)
- **I/O** 3 x USB3.2, 1 x USB2.0
1 x Line-Out, 1 x Mic-In
1 x HDMI 1.4
1 x Display Port 1.4a
- **COM Port** 2 x RS-232

LCD Display

- **Display Type** Full HD TFT LED
- **Display Size** 21.5"/15.6"
- **Max. Resolution** 21.5": 1920 x 1080
15.6": 1920 x 1080
- **Max. Colors** 16.7 M
- **Luminance** 21.5": 250 nits
15.6": 400 nits
- **Viewing Angle (H/V)** 21.5": 178°/178°
15.6": 170°/130°
- **Backlight** 50,000 hr lifetime

Touchscreen

- **Light Transmission** ≥88%
- **Resolution** 4096 x 4096 dots
- **Type** Projected capacitive


Environment

- **Humidity** 95% RH @ 40 °C/104 °F, non-condensing
(tested for 48 hrs)
- **Ingress Protection** All-round IP65 rating
- **Operating Temperature** 0 ~ 55 °C (32 ~ 131 °F)
- **Storage Temperature** -20 ~ 60 °C (-4 ~ 140 °F)


Dimensions

Unit: mm [inch]

SPC-815

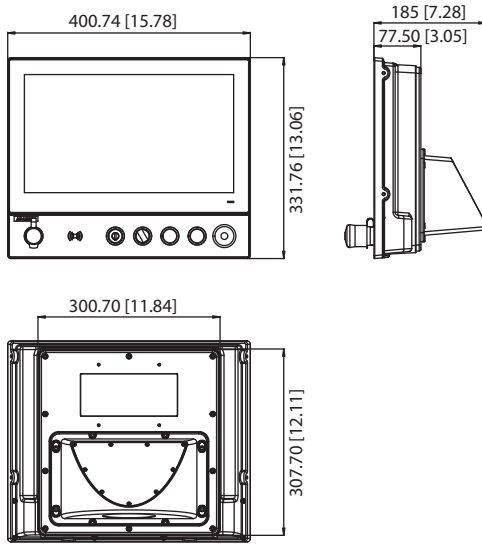

SPC-821

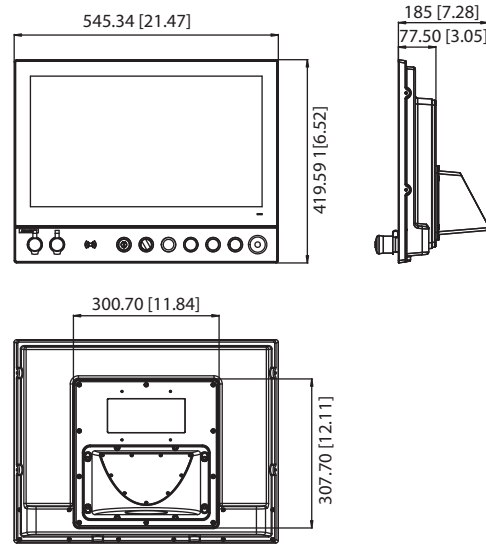

Modular Ordering Information

Note: System Unit, Operational Panel Kit should be ordered together

System Unit

- **SPC-821-D33A** IP65 standalone panel PC
21.5" FHD 1920 x 1080 P-CAP touch
Intel i3-1315URE CPU,8 GB RAM
- **SPC-815-D33A** IP65 standalone panel PC
15.6" FHD 1920 x 1080 P-CAP touch
Intel i3-1315URE CPU,8 GB RAM
- **SPC-821-D53A** IP65 standalone panel PC
21.5" FHD 1920 x 1080 P-CAP touch
Intel i5-1345URE,8 GB RAM
- **SPC-815-D53A** IP65 standalone panel PC
15.6" FHD 1920 x 1080 P-CAP touch
Intel i5-1345URE,8 GB RAM

Operational Panel Kit

- **SPC-821-OPKA** 21.5" operational panel kit, cover panel
- **SPC-821-OPKB** 21.5" operational panel kit, 1 x E-Stop, 1 x Red Push Button, 1 x Green Push Button, 1 x Blue Push Button, 1 x Key Selector, 1 x Front Extended USB Port
- **SPC-821-OPKC** 21.5" operational panel kit, 1 x E-Stop, 1 x Red Push Button, 1 x Green Push Button, 1 x Blue Push Button, 1 x Key Selector, 1 x Front Extended USB Port, 1 x RFID Antenna*
- **SPC-815-OPKA** 15.6" operational panel kit, cover panel
- **SPC-815-OPKB** 15.6" operational panel kit, 1 x E-Stop, 1 x Red Push Button, 1 x Green Push Button, 1 x Blue Push Button, 1 x Key Selector, 1 x Front Extended USB Port
- **SPC-815-OPKC** 15.6" operational panel kit, 1 x E-Stop, 1 x Red Push Button, 1 x Green Push Button, 1 x Blue Push Button, 1 x Key Selector, 1 x Front Extended USB Port, 1 x RFID Antenna*

Optional Accessories

- **1702002600** Power cable US plug 1.8 M
- **1702002605** Power cable EU plug 1.8 M
- **1702031801** Power cable UK plug 1.8 M
- **1700000596** Power cable China plug 1.8 M
- **96PSA-A120W24T2-4** 120W 24V_{DC} power supply

Packing List

Item	Part No.	Depiction	Qty
Plug-In Block	1652002205	Plug-In Block 1x3P/5.08mm/PA66/F/VA/Sn/GR/H15	1
Grounding cable	1703011001-11	A Cable G-TEM 4.3 100CM C=GR/Y	1
Flange	9651800M000	Accessory Kit for SPC-800 (M) PIPE Mounting	1