



Main Features

- ♦ Support 6th & 7th generation Intel® Core™ i7/i5/i3 LGA socket type embedded processor
- ♦ Intel® Q170 PCH
- ♦ Support 2 x 2.5" SATA HDD
- ♦ 1 x DVI-D, 1 x DP, and 1 x HDMI with independent display support
- ♦ Three Intel® GbE LAN ports; support WoL, teaming and PXE
- ♦ 1 x External M.2 B Key (2042) socket and 1 x SIM card socket
- ♦ 4 x USB 3.0 and 2 x USB 2.0
- ♦ 2 x RS232/422/485 with auto flow control and 1 x RS232 via COM 3
- ♦ 2 x Internal mini PCIe sockets support optional Wi-Fi/3.5G/mSATA/Fieldbus
- ♦ Support +9V to 30VDC input; ATX power mode
- ♦ 1 x Two 2.5" HDD bracket trays

Product Overview

Integrated with 6th & 7th generation Intel® Core™ i7/i5/i3 processors, NISE 3800 series is the fanless PC designed for industrial applications which demand high CPU and graphics performance. NISE 3800 supports up to 32G DDR4 memory and have several options on storage devices like M.2, HDD, mSATA or SSD. NISE 3800 supports wide range of DC input from +9V to 30V DC input, and can be operated in an extended operating temperature range between -5 to 60 Celsius degree (uses wide temperature memory and storage). For extended module availability, NISE 3800 also designed two internal mini PCIe sockets to support IoT applications (integrate with optional GbE LAN, Wi-Fi, 3.5G module) and common communication applications (integrate with optional GPIO, RS232/422/485 module).

Specifications

CPU Support

- ♦ Support 6th & 7th generation Intel® Core™ i7/i5/i3 LGA socket type embedded processor
 - Intel® Core™ i7-7700T, Quad Core, 2.9GHz, 8M Cache
 - Intel® Core™ i5-7500T, Quad Core, 2.7GHz, 6M Cache
 - Intel® Core™ i3-7101TE, Dual Core, 3.9GHz, 3M Cache
 - Intel® Celeron® G3930TE 2.7GHz, 2M Cache
 - Intel® Core™ i7-6700TE, Quad Core, 2.4GHz, 8M Cache
 - Intel® Core™ i5-6500TE, Quad Core, 2.3GHz, 6M Cache
 - Intel® Core™ i3-6100TE, Dual Core, 2.7GHz, 4M Cache
 - Intel® Pentium® Processor G4400TE 2.4GHz, 3M Cache
 - Intel® Celeron® Processor G3900TE 2.3GHz, 2M Cache
- ♦ Turbo-boost disabled by default

Main Memory

- ♦ 2 x DDR4 SO-DIMM socket, support up to 32GB with un-buffered and non-ECC

Display Option

- ♦ Three independent display
 - HDMI + DP+ DVI-D
 - ♦ Dual independent display
 - HDMI + DP
 - HDMI + DVI-D
 - DP + DVI-D
- ♦ 4 x DB9 or 3 x DB9
 - COM1: RS232/422/485 auto flow control
 - COM2: RS232/422/485 auto flow control
 - COM3: RS232
 - ♦ 4 x USB 3.0 ports (900mA per each)
 - ♦ 2 x USB 2.0 ports (500mA per each)
 - ♦ 1 x DVI-D port
 - ♦ 1 x HDMI port
 - ♦ 3 x Intel® I210IT GbE LAN ports; support WoL, teaming and PXE
 - ♦ 1 x 2-pin remote power on/off switch
 - ♦ +9V to 30V DC input

Front I/O Interface Status LEDs

- ♦ 3 x LAN active LEDs
- ♦ 2 x GPO status/COM1/2 TX/RX LEDs
- ♦ 1 x HDD access LEDs


Front I/O Interface

- ♦ 1 x ATX power on/off switch
- ♦ 1 x DP
- ♦ 1 x Line-out and 1 x Mic-in
- ♦ 2 x Antenna holes
- ♦ 1 x External M.2 (M-key 2242) socket
- ♦ 1 x SIM card holder

Rear I/O Interface

- ♦ 4 x DB9 or 3 x DB9
 - COM1: RS232/422/485 auto flow control
 - COM2: RS232/422/485 auto flow control
 - COM3: RS232
- ♦ 4 x USB 3.0 ports (900mA per each)
- ♦ 2 x USB 2.0 ports (500mA per each)
- ♦ 1 x DVI-D port
- ♦ 1 x HDMI port
- ♦ 3 x Intel® I210IT GbE LAN ports; support WoL, teaming and PXE
- ♦ 1 x 2-pin remote power on/off switch
- ♦ +9V to 30V DC input

Dimension Drawing

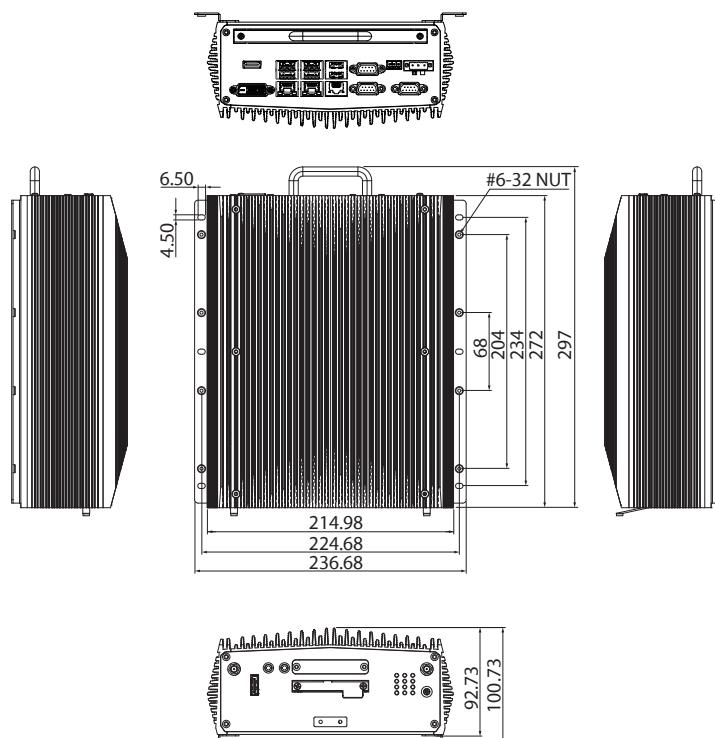

Storage Device

- 1 x External M.2 SATA 3.0 (M-key 2242) socket
- 1 x mSATA (SATA 3.0)
- 2 x 2.5" HDD (SATA 3.0) optional

Expansion Slot

- Two 2.5" HDD expansions
- 2 x Internal mini PCIe socket support optional Wi-Fi/3.5G/mSATA/Fieldbus

Power Requirements

- AT/ATX power mode (default: ATX power mode)
- Power input: +9 to +30V DC
- Power adapter: optional AC to DC power adapter (24V DC, 120W)

Dimensions

- 215 mm(W) x 272mm (D) x 93mm (H) without wall mount bracket
(8.5" x 10.7" x 3.7")

Construction

- Aluminum and metal chassis with fanless design

Environment

- Operating Temperature:
- Ambient with air flow: -5°C to 60°C, uses wide temperature memory and storage (according to IEC60068-2-1, IEC60068-2-2, IEC60068-2-14)
- Storage Temperature: -20°C to 85°C
- Relative Humidity: 10% to 93% (non-condensing)
- Shock Protection:
 - HDD: 20G, half sine, 11ms, IEC60068-27

- CFast: 50G, half sine, 11ms, IEC60068-27

- Vibration Protection with HDD Condition:
 - Random: 0.5Grms @ 5~500 Hz, IEC60068-2-64
 - Sinusoidal: 0.5Grms @ 5~500 Hz, IEC60068-2-6

Certifications

- CE approval- EN61000-6-2- EN61000-6-4
- FCC Class A

OS Support Lists

- Windows 7 32-bit and 64-bit
- Windows 8.1 32-bit and 64-bit
- Windows 10 64 bits

Weight Information

- Gross weight: 5.9kg
- Net weight: 4.5kg

Ordering Information

- **NISE 3800R System (P/N: 10J00380001X0)**
6th & 7th generation Intel® Core™ i7/i5/i3 Fanless system with two external 2.5" HDD brackets to support RAID 0/1
- **24V, 120W AC to DC power adapter w/o power cord (P/N: 7400120029X00, Lite-On)**