


AIMB-586

**Intel® Xeon® E3/ Core™ i7/i5/i3 LGA1151
MicroATX with HDMI/2 DP++/eDP (LVDS)/
6 COM, Quad LANs, SATA III, USB 3.1,
ATX or 12V DCIN**

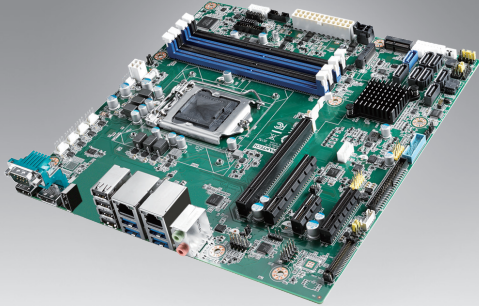

Features

- Supports Intel® Xeon® 8th Gen Core™ i7/i5/i3 processor with Q370/C246/H310 chipset
- 4 U-DIMM sockets support up to 64 GB DDR4 2400/2666 MHz SDRAM
- Supports HDMI, 2 DP++, eDP (LVDS) display
- Supports Intel AMT 12.0 and Intel vPro competent
- Supports PCIe Gen3, max up to 4x USB 3.1 (Gen2), 2x USB 3.0, 8x SATAIII, quad GbE LAN, 2x M.2 (M & E Key)
- Supports Software RAID 0, 1, 5, 10, TPM 1.2/2.0 (optional)
- Supports WISE-PaaS and Embedded Software APIs

Software APIs:    


Utilities:  



Specifications

	CPU	E-2176G	E-2124G	i7-8700	i7-8700T	i5-8500	i5-8500T	i3-8100	i3-8100T	Pentium G5400/G5400T	Celeron G4900/G4900T		
Processor System	Core Number	6	4	6	6	6	6	4	4	2	2		
	Max. Speed	3.7GHz	3.4GHz	3.2GHz	2.4GHz	3.0GHz	2.1GHz	3.6GHz	3.1GHz	3.7GHz/3.1GHz	3.1GHz/2.9GHz		
	Integrated Graphics	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes		
	L3 Cache	12MB	8MB	12M	12M	9M	9M	6M	6M	4M/4M	2M/2M		
	TDP (W)	80W	71W	65W	35W	65W	35W	65W	35W	65W/35W	65W/35W		
	Supports Model	WG2	WG2	QG2/L	QG2/L	QG2/L	QG2/L	QG2/WG2/L	QG2/L	QG2/WG2/L	QG2/WG2/L		
	Chipset	Q370/C246/H310											
BIOS	AMI EFI 256 Mbit SPI												
Expansion Slot	PCIe x1 (Gen3)	1 GB/s per direction, 1 slot (QG2/WG2 only)											
	PCIe x4 (Gen3)	4 GB/s per direction, 1 slot											
	PCIe x8 (Gen3)	8 GB/s per direction, 1 slot (Default on WG2 sku, BOM Option on QG2 sku)											
	PCIe x16 (Gen3)	16 GB/s per direction, 1 slot (Only x8 Link on WG2 sku)											
	Technology	Dual Channel DDR4 2400/2666MHz Non-ECC SDRAM/ ECC SDRAM (WG2 only)											
Memory	Max. Capacity	64 GB (16GB per DIMM)											
	Socket	4 x 288 pin U DIMM (QG2/WG2)											
		2 x 288 pin U DIMM (L)											
Graphics	Controller	Intel HD Graphics Supports DirectX11.1, OpenGL 5.0 and OpenCL 2.1											
	HDMI	1, Supports max resolution HDMI 1.2 1920 x 1200 @ 60 Hz (Colay HDMI 2.0a 4096 x 2160 @ 60 Hz, via BOM Option)											
	eDP	1, Internal pin header, supports max. resolution 3840 x 2160 @ 60 Hz (Internal pin header)											
	LVDS	1 (option), Supports dual channel 48 bits up to 1920 x 1200 (colay wint eDP)											
	Display Port	2, Supports max resolution 4096 x 2304 @ 60 Hz											
	Triple Display	eDP (LVDS) + DP++ + HDMI, eDP (LVDS) + DP++ + DP++, DP++ + DP++ + HDMI											
Dual Display	DP++ + HDMI, DP++ + DP++, DP++ + eDP (LVDS), HDMI + eDP (LVDS)												
Ethernet	Controller	LAN1: Intel I219LM (QG2/WG2/L) LAN2: Intel I211AT (QG2) Intel I210AT (WG2)											
	Connector	LAN3/4: Realtek 8111G (BOM Option on QG2/WG2 sku)											
	Max Data Transfer Rate	RJ 45 x 2 (Max up to 4 ports via BOM option on QG2/WG2)											
SATA	Q'ty	6 (QG2); 8 (WG2), 1 colay with M.2 M key; 4 (L)											
	Max Data Transfer Rate	600 MB/s Max. (SATA 3.0)											
Rear I/O	Display Port	2											
	HDMI	1											
	Ethernet	2 (Default, Max 4 ports via BOM option on QG2/WG2)											
	USB	8 (4 USB 3.1, 4 USB 2.0 on QG2/WG2) 8 (4 USB 3.0, 4 USB 2.0 on L)											
	Audio	2 (Mic-in/ Line-out) (Mic-in could be configured as "Line-in" under Win OS.)											
	Serial	1 (RS-232)											
Internal Connector	USB 3.0	2 (QG2/WG2 only)											
	USB 2.0	2; can up to 4 (via BOM option)											
	Serial	5 (4 x RS-232, 1 x RS-232/422/485 with auto flow control supported on QG2/WG2)											
	SATA 3.0	1 (1 x RS-232/422/485with auto flow control supported on L)											
	Extended Display Port (eDP)/ LVDS	6 (QG2); 8 (WG2), 1 colay M.2 M-key; 4 (L)											
	PS/2 (KBMS1)	1 (Default: eDP)											
	M.2 (M key)	1 (2280 NVMe PCIe4 and SATA M.2 support, QG2/WG2 only)											
	M.2 (E key)	1 (2230 for WIFI, QG2/WG2 only)											
	GPIO	16-bit GPIO											
	Watchdog Timer	Output Interval	System reset Programmable 1 ~ 255 sec/min										
Power Requirements	Power On	Intel Core i7-8700, 16 GB DDR4 x 4pcs			+5 V		12 V		5 Vsb		-12 V		
					+1.361A		0.473A		0A		0A		
	Operating				3.3 V		0.365A		0A				
Environment	Temperature	0 ~ 60° C (14 ~ 158° F), depends on CPU speed and cooler solution								Normal			
										-40 ~ 85° C (-40 ~ 185° F)			
Physical Characteristics	Dimensions	244 mm x 244 mm (9.6" x 9.6")											
	Input Mode	ATX input (Default)/DC-IN 12V (BOM option)											

Block Diagram

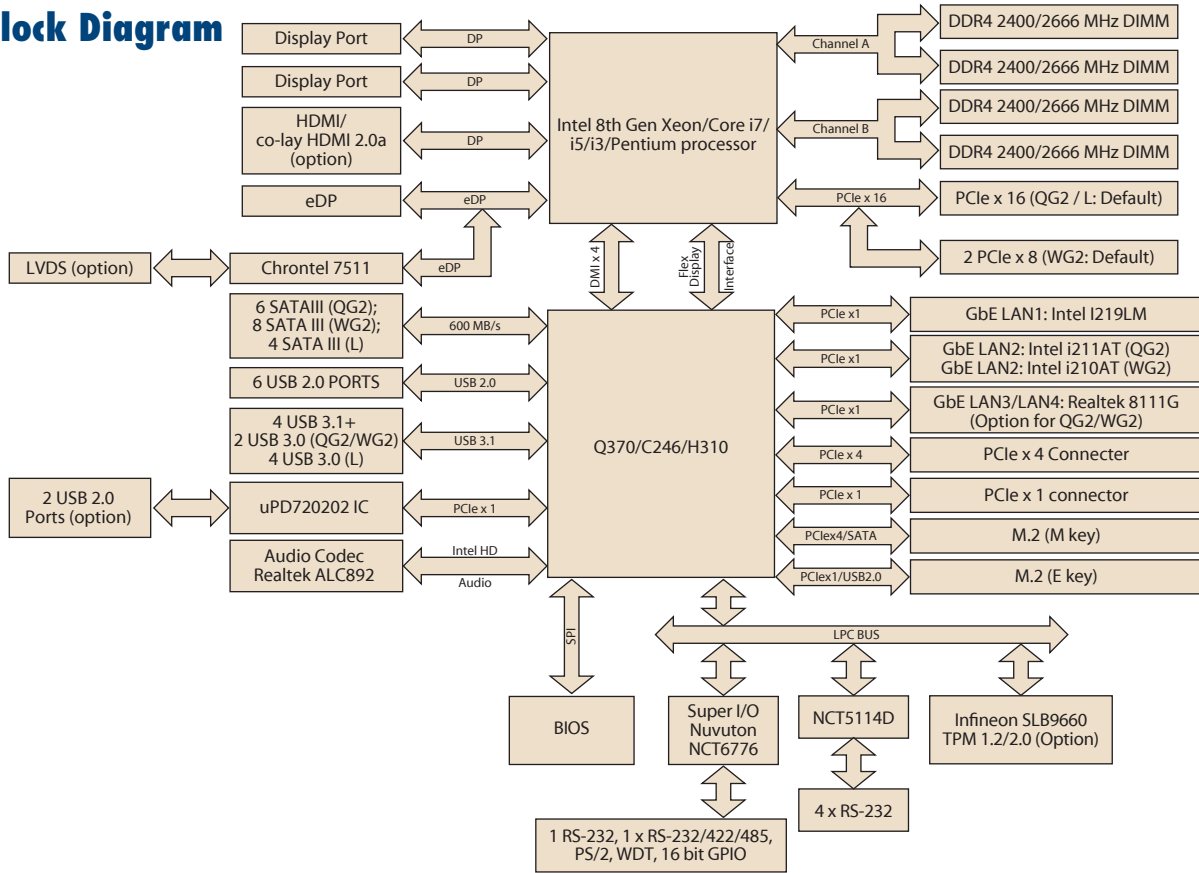

Ordering Information

P/N	Chipset	USB3.1	USB 3.0	USB 2.0	DP/HDMI	eDP (LVDS)	GbE LAN	SATA III	COM	PCIex16	PCIex8	PCIex4	PCIex1	M.2 E-key	M.2 M-key	TPM
AIMB-586QG2-00A1E	Q370	4	2	6+(2)***	2/1**	1/(1)	2+(2)	6	1	(2)	1	1	1	1	1	(1)
AIMB-586WG2-00A1E	C246	4	2	6+(2)***	2/1**	1/(1)	2+(2)	8	6	(1)	2	1	1	1	1	(1)
AIMB-586L-00A1E	H310	0	4	6+(2)***	2/1	(1)/0	1	4	2+(4)	1	0	1	0	0	0	(1)

*() BOM options available on MP version.
 ** Default: HDMI 1.2, co-layout HDMI 2.0 (BOM Option)
 *** BOM option with added USB 2.0 from controller IC

Riser Card

Part Number	Description
AIMB-RF10F-01A1E	1U riser card with 1 PCIe16 expansion

Packing List

Part Number	Description	Quantity
1700003194	SATA HDD cable	2
1700022749-13	SATA power cable	2
1960088075T000	I/O port bracket	1
2006B58610	Startup manual	1
1930001071	M.2 device screw	2

I/O View



Optional Accessories

Part Number	Description
1700020277-01	Dual port USB 3.0 cable, 30cm with IO bracket
1700002204	Dual port USB 2.0 cable 27cm with bracket
1960047669N001	LGA1156 CPU cooler for 4U and wallmount chassis, for CPU TDP ≤ 84W, 4.72" (W) x 4.72" (L) x 3.03" (H)
1960052651N021	LGA1155 CPU for cooler 2U and backplane version of chassis, for CPU TDP ≤ 65W, 3.54" (W) x 3.54" (L) x 2.68" (H)
1960053207N001	LGA1155 CPU cooler for 2U and wallmount chassis, for CPU TDP ≤ 45W, D=3.66" (W) x 3.66" (L) x 1.81" (H)
1700018699	PS/2 KB/MS cable (KMBS1) 1*6P-2.5M-DIN 6P(F)*2 25cm
1700000447	1-to-4 serial ports cable kit, 45cm
1701400181	1-to-4 serial ports cable kit, 18cm
1700026163-01	COM2, 1 to 1 COM cable 60cm (IDE 10P-2.0) w/ Bracket
TBD	1U IO bracket for chassis ACP-1010MB & HPC-7120S (should order screws separately)

Note: Purchasing AIMB-586's proprietary CPU cooler from Advantech is a must, other CPU cooler might be not compatible with AIMB-586.
 Note: screws P/N: 1933030500 for ACP-1010MB, 1930004607 for HPC-7120S

Embedded OS/API

OS/API	Part No.	
win10 IoT Ent	20706WX6HS0004	img W10 16HL(Eng)
	20706WX6VS0009	img W10 16VL(Eng)