


# ASMB-817

## 4th Gen Intel® Xeon® Scalable ATX Server Board with 8x DDR5, 3x PCIe x16, 8x SATA 3, 4x USB 3.2 (Gen1), Dual 10GbE, and IPMI

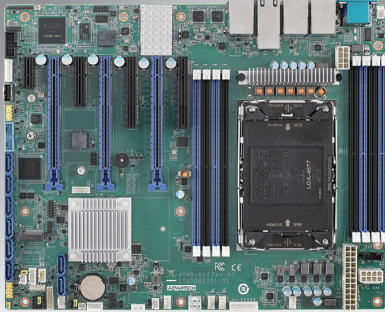

### Features

- LGA4677 ATX server board with 4th Gen. Intel Xeon® Scalable processor
- DDR5 4400/4800 MHz RDIMM up to 2TB (8 DIMMs) supports Intel® Optane™ Persistent Memory
- Features 3x PCIe x16, 2x PCIe x8, 1x PCIe x4, and 1x PCIe x1
- Intel® X710 dual 10GbE ports
- Eight SATA 3 and one M.2 connectors (SATA/PCIe compatible)
- 0 ~ 60 °C/ 32 ~ 140 °F ambient operating temperature range


CE FCC

### Specifications

Form Factor	ATX form factor	
Processor System	Socket	Intel LGA4677 (Socket E)
	CPU type	4th Gen Intel Xeon Scalable processors (CPU cooler should be purchased separately*)
Core Logic	Chipset	Intel C741 chipset
Memory	Total slots	8x (1 DIMM per channel)
	Capacity	Maximum 2TB ECC RDIMM
	Memory type	DDR5 ECC-REG 4400/4800 MHz RDIMM, supports Intel® Optane™ Persistent Memory
	Memory size	16GB, 32GB, 64GB, 128GB, 256GB
Expansion Slots	Total PCI/PCI-X/PCIe slots	7
	Slot location 1	PCIe x1 slot (x1 link), signal from PCH
	Slot location 2	PCIe x16 slot (x16 link), signal from CPU, CXL support
	Slot location 3	PCIe x4 slot (x4 link), signal from CPU
	Slot location 4	PCIe x16 slot (x16 link), signal from CPU, CXL support
	Slot location 5	PCIe x8 slot open end (x8 link), signal from PCH
	Slot location 6	PCIe x16 slot (x16 link), signal from CPU, CXL support
	Slot location 7	PCIe x8 slot close end (x8 link), signal from CPU
Graphics	VGA	Aspeed AST2600
Storage	SATA controller	Intel® C741: 8 x SATA 3 (6 Gb/s), support software RAID 0,1,5,10
	SAS controller	-
Networking	GbE/10GbE LAN	2 x Intel® I210AT / Intel® X710-AT2 (dual 10GbE ports)
Onboard I/O Connector	PSU connector	24-pin SSI power connector + 2 x 8-pin SSI 12 V power connector + 4-pin SSI 12 V power connector
	USB connector	4 x USB 2.0 ports (two onboard headers) + 2 x USB 3.2 Gen1 ports (one onboard header) + 1 x Type-A USB 2.0 port
	Fan header	6 x 4-pin (5 for system + 1 for CPU)
	M.2	1 x M.2 2280/22110 B+M key (SATA and PCIe)
	SMBus	1
	Chassis Intrusion	1
	Front LAN LED	1
	Audio Header	1
Rear I/O Connector	PS/2 KB/Mouse	1
	Serial port header	1
	External serial port	1
	External USB port	2x (USB 3.2 Gen1) + 4x USB (2.0)
	VGA port	1
	RJ-45	5x (1 port dedicated for IPMI function)
Management Solution	Software	-
	Out of band remote management	Yes
Monitoring	CPU temperature	Yes
	System Monitoring	Yes
Watchdog Timer	Output	System reset
	Interval	Programmable 1 ~ 255 sec/min
Power Requirement	Power On	3.3V 5V 5Vsb 12V 12V_8P
	(225W CPU @1.5GHz 4800 64G*8)	1.239A 1.314A 0.7A 0.052A 20.833A
Environment	Operating	Non-operating
	Temperature	0 ~ 60 °C/32 ~ 140 °F, depends on CPU speed and cooling solution
	Humidity	10% ~ 95%
Physical Characteristics	Dimension (L x H)	304 x 244 mm (12" x 9.6")
		10% ~ 95% (Non condensing)

\*CPU power design support up to 225W TDP. Please consider extended air thermal solution while using CPU > 205W TDP.

## Block Diagram

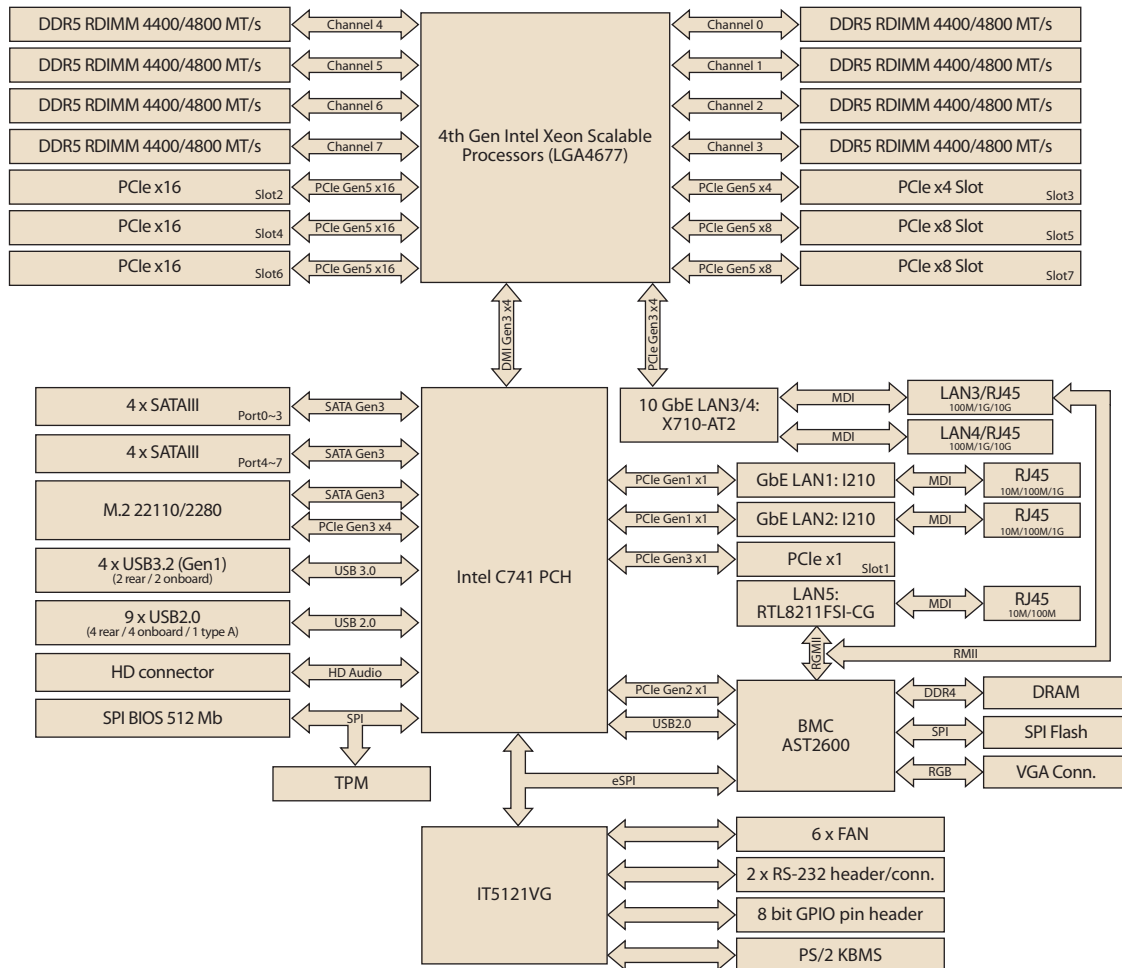

## Ordering Information

Part Number	Chipset	Memory	GbE/10GbE LAN	IPMI	Graphics
ASMB-817T2-00A1	C741	DDR5 RDIMM	2/2	Yes	AST2600
ASMB-817I-00A1	C741	DDR5 RDIMM	2/-	Yes	AST2600

## Packing List

Part Number	Description	Quantity
2042081700	Startup manual	x 1
1700003194	SATA data cables	x 2
1700022749-11	SATA power cables	x 2
1700019748	CPU power cable	x 2
1930008089	Screw for M.2 device	x 1
1960076488T001	I/O shield	x 1
1651003739-01	LGA4677 CPU carrier - E1B	x 1

## Optional Accessories

Part Number	Description
PCA-AUDIO-HDB1E	HD Audio-card*
PCA-TPMSPI-00A1	TPM 2.0 Module by SPI
1970005575T001	LGA-4677 narrow CPU heatsink for 1U chassis (185W)
1970005276T001	LGA-4677 narrow CPU cooler for 2U/4U chassis (205W)
1700002204	Dual port USB cable (27 cm/10.6 in) with bracket
1700008461	Four port USB cable (30.5 cm/12 in) with bracket
1700020277-01	Dual port USB 3.2 (Gen1) cable (30 cm/11.8 in) with bracket
1701090401	COM port cable (40 cm/15.7 in) with bracket
1700019268-11	PS/2 port cable (35 cm/13.77 in)
1960063434N000	Cable bracket for 1700019268-11
1960082347T001	For 1U chassis I/O shield
1700031684-01	Front panel convert cable

\* PCA-AUDIO-HDB1E isn't compatible with 3U chassis

## I/O View



ASMB-817T2-00A1



ASMB-817I-00A1